

User's Guide

CETTF10xx-105

Slide-in-Module Media Converter

- **Ethernet**
- **Copper to Fiber**
- **10Base-T to 10Base-FL**

Transition Networks CETTF10xx-105 series Ethernet 10Base-T to 10Base-FL media converters (designed to be installed in a *PointSystem™* chassis) connect 10Base-T twisted-pair copper cable to multimode or single mode 10Base-FL fiber-optic cable.

Part Number	Port One - Copper 10Base-T	Port Two - Fiber-Optic 10Base-FL
CETTF1011-105	RJ-45 100 m (328 ft)*	ST, 850 nm multimode, duplex 2 km (1.2 miles)
CETTF1012-105	RJ-45 100 m (328 ft)*	ST, 1310 nm single mode, duplex 20 km (12.4 miles)
CETTF1013-105	RJ-45 100 m (328 ft)*	SC, 850 nm multimode, duplex 2 km (1.2 miles)
CETTF1014-105	RJ-45 100 m (328 ft)*	SC, 1310 nm single mode, duplex 20 km (12.4 miles)
CETTF1014-106	RJ-45 100 m (328 ft)*	SC, 1310 nm single mode, duplex 20 km (12.4 miles)
CETTF1015-105	RJ-45 100 m (328 ft)*	SC, 1310 nm single mode, duplex 40 km (24.9 miles)
CETTF1018-105	RJ-45 100 m (328 ft)*	MT-RJ, 850 nm multimode, duplex 2 km (1.2 miles)
CETTF1022-105	RJ-45 100 m (328 ft)*	ST, 1310 nm single mode, duplex 40 km (24.9 miles)
CETTF1027-105	RJ-45 100 m (328 ft)*	ST, 1300 nm multimode, duplex 5 km (3.1 miles)
CETTF1029-105*	RJ-45 100 m (328 ft)*	SC, 1310 nm (TX) / 1550 nm (RX) single fiber, 20 km (12.4 miles)
CETTF1029-106*	RJ-45 100 m (328 ft)*	SC, 1550 nm (TX) / 1310 nm (RX) single fiber, 20 km (12.4 miles)

* **CETTF1029-105** and **CETTF1029-106** are designed to be installed in the same network where one is the local converter and the other is the remote converter.


The distances listed are the typical maximum cable distance. Actual distance is dependent upon the physical characteristics of the network installation.

Installation

CAUTION: Wear a grounding device and observe electrostatic discharge precautions when setting the 4-position switch and the jumper and when installing the media converter. **Failure to observe this caution could result in damage to, and subsequent failure of, the media converter.**

Set the 4-Position Switch

- The 4-position switch is located on the media converter circuit board.
- Use a small flat-blade screwdriver to set the switches (see the drawing).

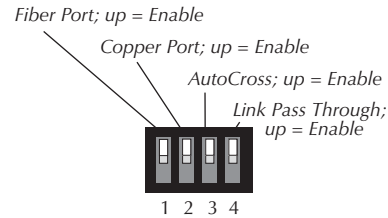

NOTE: When the fiber port or the copper port is disabled (switches 1 and 2), network traffic coming into the media converter is ignored and no traffic flows out. In this mode, the media converter is disconnected from the network.

1. Fiber Port (10Base-FL)

- Up Enable network traffic on the fiber port.
- Down Disable network traffic on the fiber port.

2. Copper Port (10Base-T)

- Up Enable network traffic on the copper port.
- Down Disable network traffic on the copper port.

3. AutoCross

- Up Enable AutoCross (see page 6).
- Down Disable AutoCross.
(When AutoCross is disabled, the 10Base-T (copper) port is in MDI-X (crossover) mode.)

4. Link Pass-Through

- Up Enable Link Pass-Through (see page 6).
- Down Disable Link Pass-Through.
(When Link Pass-Through is disabled, remote faults are not passed along to any downstream equipment.)

Set the Hardware/Software Jumper

The hardware/software jumper is located on the media converter circuit board. Use small needle-nosed pliers or a similar device to set the jumper.


Hardware	The media converter mode is determined by the 4-position switch settings.	H S Hardware Mode
Software	The media converter mode is determined by the most-recently saved, on-board microprocessor settings.	H S Software Mode

Installation -- Continued

Install the Slide-in-Module

CAUTION: Wear a grounding device and observe electrostatic discharge precautions when installing the CETTF10xx-105 slide-in-module media converter. **Failure to observe this caution could result in damage to, and subsequent failure of, the media converter.**

- Carefully slide the slide-in-module into the installation slot, aligning the module with the installation guides.
- Ensure that the module is firmly seated inside the chassis.
- Push in and rotate the attached panel fastener screw clockwise to secure the module to the chassis front.

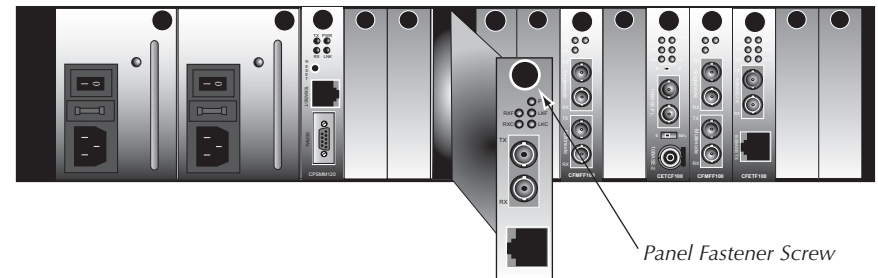

Connect the Twisted-Pair Copper Cable

NOTE: The AutoCross feature allows either MDI (straight-through) or MDI-X (crossover) cable connections to be configured automatically, according to the network conditions.


- Locate or build 10Base-T copper cables with male, RJ-45 connectors installed at both ends.
- Connect the RJ-45 connector at one end of the cable to the RJ-45 port on the CETTF10xx-105 media converter.
- Connect the RJ-45 connector at the other end of the cable to the RJ-45 port on the other device (switch, workstation, etc.).



Installation -- Continued

Connect the fiber cable

1. Locate or build IEEE 803.2™ compliant 10Base-FL fiber cable with male, two-stranded TX to RX connectors installed at both ends.
2. Connect the fiber cables to the CETTF10xx-105 media converter as described:
 - Connect the male TX cable connector to the female TX port.
 - Connect the male RX cable connector to the female RX port.
3. Connect the fiber cables to the other device (another media converter, hub, etc.) as described:
 - Connect the male TX cable connector to the female RX port.
 - Connect the male RX cable connector to the female TX port.

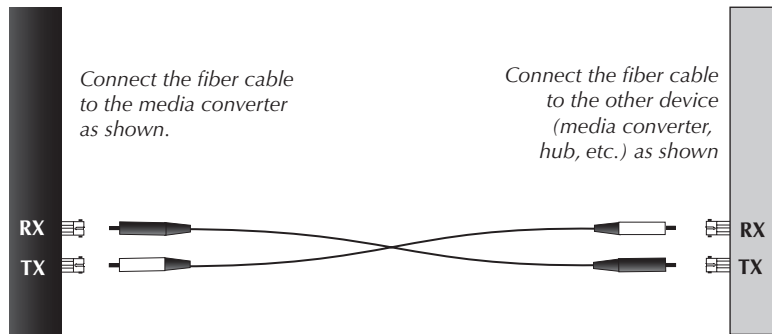

Power the Media Converter


The slide-in-module media converter is powered through the Transition Networks *PointSystem*™ chassis.

Operation

Status LEDs

Use the status LEDs to monitor the media converter operation in the network

PWR	(Power)	On = Connection to external AC power.
LKF	(Link - fiber)	On = The fiber link is up. Off = A lack of power or a broken fiber link.
LKC	(Link - copper)	On = The copper link is up. Off = A lack of power or a broken copper link.
RXF	(Receive - fiber)	Flashing = Data reception on the fiber link.
RXC	(Receive - copper)	Flashing = Data reception on the copper link.

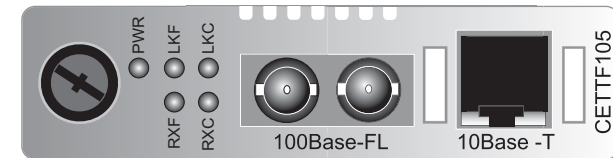

SNMP

Use SNMP at an attached terminal or at a remote location to monitor the media converter by monitoring:

- Media converter power.
- Copper link and fiber link status.
- Copper receive and fiber receive status.
- Hardware switch settings.
- Fault condition.

Also, use SNMP to enter network commands that:

- Enable/disable the copper port .
- Enable/disable the fiber port.
- Enable/disable AutoCross.
- Enable/disable Link Pass Through.
- Power down the media converter.

See the on-line documentation that comes with Transition Networks *FocalPoint*™ software for applicable commands and usage at www.transition.com.

Operation -- Continued

Product Features


AutoCross™

When the AutoCross feature is activated, it allows either straight-through (MDI) or crossover (MDI-X) copper cables to be used when connecting to 10Base-T devices. AutoCross determines the characteristics of the connection and automatically configures the unit to link up, regardless if the copper cable is MDI or MDI-X configuration.

NOTE: Factory default is “enable AutoCross.” Transition networks recommends leaving the device in the “enable” mode.

Link Pass Through

The Link Pass-Through feature allows the media converter to monitor both the fiber and copper RX (receive) ports for loss of signal. In the event of a loss of an RX signal (1), the media converter will automatically disable the TX (transmit) signal (2), thus, “passing through” the link loss (3). The far-end device is automatically notified of the link loss (4), which prevents the loss of valuable data unknowingly transmitted over an invalid link.

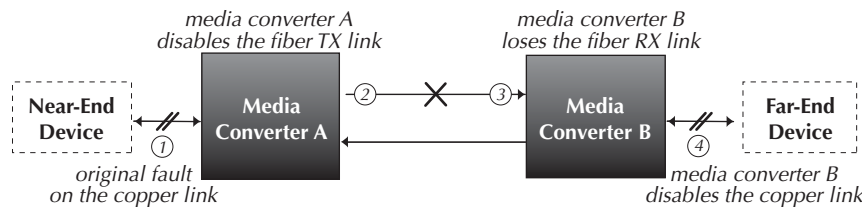

NOTE: An enable/disable switch allows the Link Pass Through feature to be disabled. Link Pass Through may interfere with the Auto-Negotiation feature of other devices in networks where there are two media converters installed in series.

Cable Specifications

The physical characteristics must meet or exceed IEEE 802.3™ specifications.

Fiber Cable

Bit Error Rate:	<10 ⁻⁹	
Single mode fiber (recommended):	9 μm	
Multimode fiber (recommended):	62.5/125 μm	
Multimode fiber (optional):	100/140, 85/140, 50/125 μm	
CETTF1011-105	850 nm multimode	
CETTF1013-105	850 nm multimode	
Fiber Optic Transmitter Power:	min: -19.0 dBm	max: -14.0 dBm
Fiber Optic Receiver Sensitivity:	min: -32.5 dBm	max: -14.0 dBm
Link Budget:	13.5 dB	
CETTF1012-105	1310 nm single mode	
Fiber Optic Transmitter Power:	min: -27.0 dBm	max: -10.0 dBm
Fiber Optic Receiver Sensitivity:	min: -34.0 dBm	max: -14.0 dBm
Link Budget:	7.0 dB	
CETTF1014-105	1310 nm single mode	
CETTF1014-106	1310 nm single mode	
Fiber Optic Transmitter Power:	min: -19.0 dBm	max: -14.0 dBm
Fiber Optic Receiver Sensitivity:	min: -34.0 dBm	max: -3.0 dBm
Link Budget:	15.0 dB	
CETTF1015-105	1310 nm single mode	
Fiber Optic Transmitter Power:	min: -15.0 dBm	max: -8.0 dBm
Fiber Optic Receiver Sensitivity:	min: -38.0 dBm	max: -8.0 dBm
Link Budget:	23.0 dB	
CETTF1018-105	850 nm multimode	
Fiber Optic Transmitter Power:	min: -16.0 dBm	max: -10.0 dBm
Fiber Optic Receiver Sensitivity:	min: -29.5 dBm	max: -7.2 dBm
Link Budget:	13.5 dB	
CETTF1022-105	1310 nm single mode	
Fiber-optic Transmitter Power:	min: -15.0 dBm	max: -5.0 dBm
Fiber-optic Receiver Sensitivity:	min: -34.0 dBm	max: -14.0 dBm
Link Budget:	19.0 dB	
CETTF1027-105	1300 nm multimode	
Fiber-optic Transmitter Power:	min: -19.0 dBm	max: -15.0 dBm
Fiber-optic Receiver Sensitivity:	min: -32.5 dBm	max: -14.0 dBm
Link Budget:	13.5 dB	
CETTF1029-105	1310 nm (TX) / 1550 nm (RX) simplex	
CETTF1029-106	1550 nm (TX) / 1310 nm (RX) simplex	
Fiber Optic Transmitter Power:	min: -14.0 dBm	max: -8.0 dBm
Fiber Optic Receiver Sensitivity:	min: -33.0 dBm	max: -3.0 dBm
Link Budget:	19.0 dB	

The fiber optic transmitters on this device meets Class I Laser safety requirements per IEC-825/CDRH standards and complies with 21 CFR1040.10 and 21CFR1040.11.

Cable Specifications -- Continued

Copper Cable


Category 3: (minimum requirement)

Gauge	24 to 22 AWG
Attenuation	11.5 dB/100m @ 5-10 MHz
Maximum Cable Distance	100 meters

Category 5: (recommended)

Gauge	24 to 22 AWG
Attenuation	22.0 dB /100m @ 100 MHz
Maximum Cable Distance	100 meters

- Use straight-through (MDI) or crossover (MDI-X) twisted-pair cable.
- Shielded twisted-pair or unshielded twisted-pair may be used
- Pins 1&2 and 3&6 are the two active pairs in an Ethernet network .
- Use only dedicated wire pairs for the active pins:
(e.g., blue/white & white/blue, orange/white & white/orange, etc.)
- Do not use flat or silver satin wire.

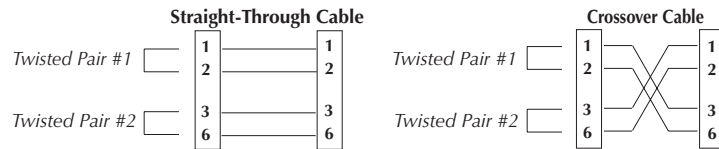

Technical Specifications

For use with Transition Networks Model CETTF10xx-105 or equivalent.

Standards	IEEE 802.3™
Data Rate	10 Mb/s
Dimensions	3.4" x 0.86" x 5.0" (86 x 22 x 127 mm)
Weight	3 oz (91 g) (approximate)
Power Consumption	2.3 watts
MTBF*	408,000 hours (MIL217F2 V5.0) (MIL-HDBK-217F) 1,412,000 hours (Bellcore7 V5.0)
Environment	Tmra*: 0 to 60°C (32 to 140°F) Storage Temp: -20 to 85°C (-4 to 185°F) Humidity: 10 to 90%, non condensing Altitude: 0 to 10,000 feet
Warranty	Lifetime

*Manufacturer's rated ambient temperature: Tmra range for this slide-in-module depends on the physical characteristics and the installation configuration of the Transition Networks PointSystem™ chassis in which this slide-in-module will be installed.

The information in this user's guide is subject to change. For the most up-to-date information on the CETTF10xx-105 media converter, view the user's guide on-line at: www.transition.com.

WARNING: Visible and invisible laser radiation when open. Do not stare into the beam or view the beam directly with optical instruments. Failure to observe this warning could result in an eye injury or blindness.

WARNING: Use of controls, adjustments or the performance of procedures other than those specified herein may result in hazardous radiation exposure.

WARNING: If the media converter is an IEEE802.3-2005 Powered Device (PD) capable of receiving power via the Media Dependent Interface (MDI) leads, the power source, connector, and cabling attached to the barrel power connector must meet the isolation requirement specified in IEEE802.3-2005. Failure to observe this warning could result in an electrical shock.

IMPORTANT: Copper based media ports, e.g., Twisted Pair (TP) Ethernet, USB, RS232, RS422, RS485, DS1, DS3, Video Coax, etc., are intended to be connected to intra-building (inside plant) link segments that are not subject to lightening transients or power faults. Copper based media ports, e.g., Twisted Pair (TP) Ethernet, USB, RS232, RS422, RS485, DS1, DS3, Video Coax, etc., are NOT to be connected to inter-building (*outside plant*) link segments that are subject to lightening transients or power faults. Failure to observe this caution could result in damage to equipment.

*MTBF is estimated using the predictability method. This method is based on MIL-217F at 25°C ambient temperature, typical enclosure heat rise of 10°C, and nominal operating conditions and parameters. Installation and configuration specific MTBF estimates are available upon request. Contact Technical Support.

Troubleshooting

If the media converter fails, isolate and correct the failure by determining the answers to the following questions and then taking the indicated action:

1. Is the PWR LED illuminated?
NO
 - Is the media converter slide-in-module installed properly in the chassis?
 - Is the power cord properly installed in the chassis and at the external power source?
 - Does the external power source provide power?
 - Contact Tech Support: (800) 260-1312, Int'l: 00-1-952-941-7600.
 YES
 - Proceed to step 2.
2. Is the LKC LED illuminated?
NO
 - Check twisted-pair cables for proper connection.
 - Contact Tech Support: (800) 260-1312, Int'l: 00-1-952-941-7600.
 YES
 - Proceed to step 3.
3. Is the LKF LED illuminated?
NO
 - Check fiber cables for proper connection.
 - Verify that TX and RX cables on media converter are connected to RX and TX ports, respectively, on other device.
 - Contact Tech Support: (800) 260-1312, Int'l: 00-1-952-941-7600.
 YES
 - Proceed to step 4.
4. Is the RXC LED flashing?
NO
 - If there is no activity on the 10Base-T port, proceed to step 5.
 - If there is activity on the 10Base-T port, disconnect and reconnect the 10Base-T cable to restart the initialization process.
 - Restart the workstation to restart the initialization process.
 - Contact Tech Support: (800) 260-1312, Int'l: 00-1-952-941-7600.
 YES
 - Proceed to step 5.
5. Is the RXF LED flashing?
NO
 - If there is no activity on the 10Base-FL port, continue below
 - If there is activity on the 10Base-FL port, disconnect and reconnect the 10Base-FL cable to restart the initialization process.
 - Verify that TX and RX cables on media converter are connected to RX and TX ports, respectively, on other device.
 - Restart the workstation to restart the initialization process.
 - Contact Tech Support: (800) 260-1312, Int'l: 00-1-952-941-7600.
 YES
 - Contact Tech Support: (800) 260-1312, Int'l: 00-1-952-941-7600.

Contact Us

Technical Support

Technical support is available 24 hours a day.

US and Canada: **1-800-260-1312**

International: **00-1-952-941-7600**

Transition Now

Chat live via the Web with Transition Networks Technical Support.

Log onto **www.transition.com** and click the **Transition Now** link.

Web-Based Seminars

Transition Networks provides seminars via live web-based training.

Log onto **www.transition.com** and click the **Learning Center** link.

E-Mail

Ask a question anytime by sending an e-mail to our technical support staff.

techsupport@transition.com

Address

Transition Networks



6475 City West Parkway

Minneapolis, MN 55344, U.S.A.

telephone: 952-941-7600

toll free: 800-526-9267

fax: 952-941-2322

 Declaration of Conformity	
Name of Mfg:	Transition Networks 6475 City West Parkway, Minneapolis MN 55344 U.S.A.
Model:	CETTF10xx-105 Series Media Converters
Part Number(s):	CETTF1011-105, CETTF1012-105, CETTF1013-105, CETTF1014-105, CETTF1014-106, CETTF1015-105, CETTF1018-105, CETTF1022-105, CETTF1027-105, CETTF1029-105, CETTF1029-106
Regulation:	EMC Directive 89/336/EEC
Purpose:	To declare that the CETTF10xx-105 to which this declaration refers is in conformity with the following standards. CISPR 22:1993; EN 55022:1994+A1:1995+A2:1997; EN 55024:1998 Class A; FCC Part 15 Subpart B; EN 61000-3-2:1995; EN61000-3-3:1995
I, the undersigned, hereby declare that the equipment specified above conforms to the above Directive(s) and Standard(s).	
 Stephen Anderson, Vice-President of Engineering	April, 12 2006 Date

Compliance Information

CISPR22/EN55022 Class A + EN55204

CE Mark

FCC Regulations

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at the user's own expense.

Canadian Regulations

This digital apparatus does not exceed the Class A limits for radio noise for digital apparatus set out on the radio interference regulations of the Canadian Department of Communications. Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la Class A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

European Regulations

Warning This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Achtung! Dieses ist ein Gerät der Funkstörgrenzwertklasse A. In Wohnbereichen können bei Betrieb dieses Gerätes Rundfunkstörungen auftreten. In diesem Fall ist der Benutzer für Gegenmaßnahmen verantwortlich.

Attention! Ceci est un produit de Classe A. Dans un environnement domestique, ce produit risque de créer des interférences radioélectriques, il appartiendra alors à l'utilisateur de prendre les mesures spécifiques appropriées.



In accordance with European Union Directive 2002/96/EC of the European Parliament and of the Council of 27 January 2003, Transition Networks will accept post usage returns of this product for proper disposal. The contact information for this activity can be found in the 'Contact Us' portion of this document.



CAUTION: RJ connectors are NOT INTENDED FOR CONNECTION TO THE PUBLIC TELEPHONE NETWORK. Failure to observe this caution could result in damage to the public telephone network.

Der Anschluss dieses Gerätes an ein öffentliches Telekommunikationsnetz in den EG-Mitgliedstaaten verstößt gegen die jeweiligen einzelstaatlichen Gesetze zur Anwendung der Richtlinie 91/263/EWG zur Angleichung der Rechtsvorschriften der Mitgliedstaaten über Telekommunikationsendeinrichtungen einschliesslich der gegenseitigen Anerkennung ihrer Konformität.

Trademark Notice

All trademarks and registered trademarks are the property of their respective owners.

Copyright Restrictions

© 2001, 2003 - 2005 Transition Networks.

All rights reserved. No part of this work may be reproduced or used in any form or by any means - graphic, electronic, or mechanical - without written permission from Transition Networks.

Printed in the U.S.A.

33204.E
