


Installation Guide

C2210:

- **Fast Ethernet**
- **One Copper & One Fiber Port**
- **10/100Base-TX to 100Base-FX Connectivity**

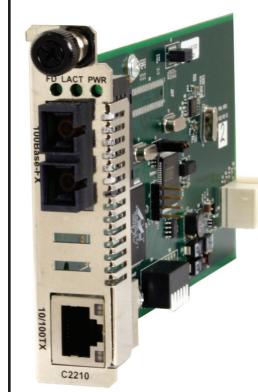

The two-port C2210 Ethernet/Fast Ethernet ION chassis slide-in card (SIC) is designed to install in the Transition Networks ION chassis. The C2210 connects 10Base-T Ethernet or 100Base-TX Fast Ethernet twisted-pair copper network devices to network devices on a 100Base-FX Fast Ethernet fiber network. The C2210 has one copper port and one fiber-optic port.

Part Number	Port 1 - Copper 10/100-Base-T	Port 2 - Duplex Fiber-Optic 100Base-FX
C2210-1011	RJ-45 100 m (328 ft)	ST, 1300 nm multimode 2 km (1.2 miles)*
C2210-1013	RJ-45 100 m (328 ft)	SC, 1300 nm multimode 2 km (1.2 miles)*
C2210-1014	RJ-45 100 m (328 ft)	SC, 1300 nm single mode 20 km (12.4 miles)
C2210-1015	RJ-45 100 m (328 ft)	SC, 1300 nm single mode 40 km (24.9 miles)*
C2210-1016	RJ-45 100 m (328 ft)	SC, 1300 nm single mode 60 km (32.3 miles)*
C2210-1017	RJ-45 100 m (328 ft)	SC, 1550 nm single mode 80km (49.7 miles)*
C2210-1019	RJ-45 100 m (328 ft)	LC, 1300 nm multimode 2Km (1.2 miles)*
C2210-1035	RJ-45 100 m (328 ft)	SC, 1310 nm single mode 120 km (77.5 miles)*
C2210-1039	RJ-45 100 m (328 ft)	LC, 1300 nm multimode 20Km (12.4 miles)*
C2210-1040	RJ-45 100 m (328 ft)	SFP slot (<i>empty</i>)

*Typical maximum cable distance. Actual distance is dependent upon the physical characteristics of the network.

Installation	3
Operation	7
Cable Specifications	10
Technical Specifications	12
Troubleshooting	13
Contact Us	14
Compliance Information	15


Part Number	Port 1 - Copper 10/100-Base-T	Port 2 - 100Base FX Fiber-Optic
C2210-1029-A1	RJ-45 100 m (328 ft)	SC, 1310nm TX/1550 nm RX single mode 20 km (12.4 miles)
C2210-1029-A2	RJ-45 100 m (328 ft)	SC, 1550nm TX/1310 nm RX single mode 20 km (12.4 miles)
C2210-1029-B1	RJ-45 100 m (328 ft)	SC, 1310nm TX/1550 nm RX single mode 40 km (24.9 miles)
C2210-1029-B2	RJ-45 100 m (328 ft)	SC, 1550nm TX/1310 nm RX single mode 40 km (24.9 miles)
Install C2210-1029-xx and C2210-1029-xx single-fiber optic in the same network where one is the local converter and the other is the remote converter.		

Installation

CAUTION: Wear a grounding device and observe electrostatic discharge precautions when setting the 6-position switch, removing and inserting circuit board jumper(s), and installing the SIC. Failure to observe this caution could result in damage to or failure of the SIC.

Set the 6-position switch

- The 6-position switch is located on the side of the SIC.
- Use a small flat blade screwdriver or a similar tool to set the recessed switches.
- Refer to the drawing to the right for the locations of the individual switches.

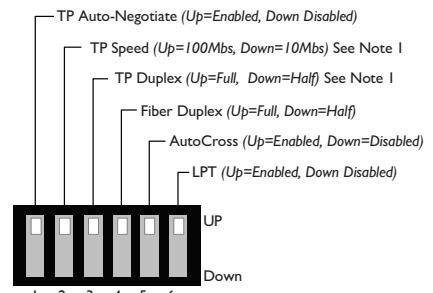

Note 1: Auto-Negotiation must be OFF.

- TP Auto-Negotiation (*See Note 1.*)

up	Enables Auto-Negotiation on the copper port.
down	Disables Auto-Negotiation on the copper port.
- TP Speed (*See Note 1.*)

up	100 Mbps operation on the copper port.
down	10 Mbps operation on the copper port.
- TP Copper Mode

up	full duplex operation on the copper port.
down	half duplex operation on the copper port.
- Fiber Mode

up	Forces full duplex operation on the fiber port.
down	Forces half duplex operation on the fiber port.
- TP AutoCross

up	Enabled.
down	Disabled
- Link Pass Through (LPT)

up	Enabled
down	Disabled


Installation — Continued

Hardware/software mode jumper

The jumpers are located on the SIC circuit board. Use small needle-nosed pliers or a similar tool to set the jumper.

The Hardware/Software jumper is labeled "H" for hardware and "S" for software.

Hardware	The mode of operation of the media converter is determined by the 6-position switch settings. Default is the Hardware position.
Software	The mode of operation of the media converter is determined by the most recently saved on-board microprocessor settings.




Installation — Continued

Install the SIC

To install the C2210 SIC:

1. Locate an empty installation slot on the ION chassis.
2. Carefully slide the module into the installation slot, aligning the module with the installation guides.
3. Ensure that the module is firmly seated to the chassis backplane.
4. Push in and rotate the panel fastener screw to secure the module to the chassis front.

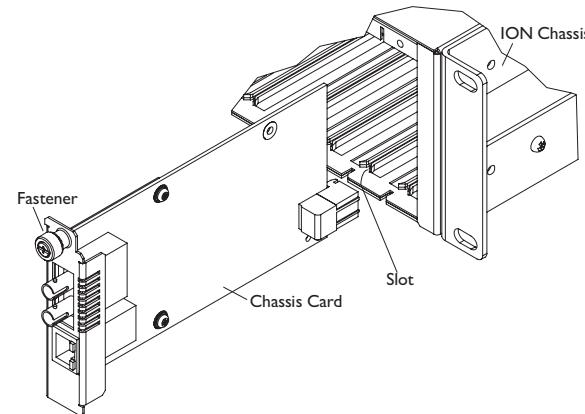

Power the 2210 SIC


The C2210 module SIC is powered through the ION chassis.

Installation — Continued

Install the twisted-pair copper cable

1. Locate IEEE 803.2 compliant 10Base-T or 100Base-TX cable with RJ-45 connectors installed on both ends.
2. Connect the RJ-45 connector at one end of the cable to the RJ-45 port connector on the SIC.
3. Connect the RJ-45 connector at the other end of the cable to the RJ-45 port connector on the other device (*switch, workstation, etc.*).

Note: The MDI (*straight-through*) or MDI-X (*crossover*) cable connection is configured automatically, when the AutoCross jumper is in the enabled position.

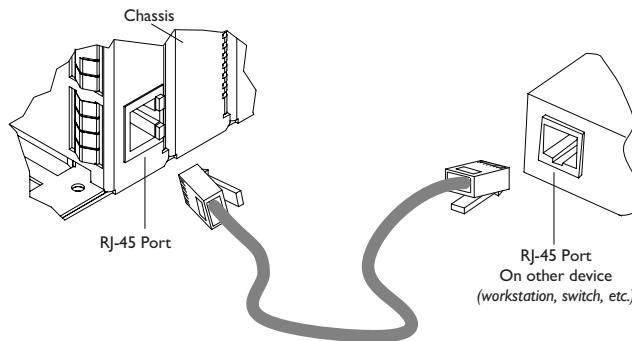

Install the fiber cable

1. Locate or build IEEE 803.2™ compliant 100Base-FX fiber cable with male, two-stranded TX to RX connectors installed at both ends.
2. Connect the fiber cables to the C2210 SIC as described:
 - Connect the male TX cable connector to the female TX connector.
 - Connect the male RX cable connector to the female RX connector.
3. Connect the fiber cables to the other device (*SIC, hub, etc.*) as described:
 - Connect the male TX cable connector to the female RX connector.
 - Connect the male RX cable connector to the female TX connector.



Operation

Status LEDs

Use the status LEDs to monitor the SIC and the network connections.

FD (Fiber Duplex)

ON = Full duplex fiber connection.

OFF = Half duplex fiber connection.

LACT (Fiber Link)

ON = Fiber link connection.

Blink = Fiber network activity

PWR (Power)

ON = Power applied to chassis card

TP LED 1 (Twisted-Pair Speed)


ON Green = 100 Mb/s

ON Yellow = 10 Mb/s

TD LED 2 (Twisted Pair Duplex)

ON Green = Full duplex, blink activity

ON Yellow = Half duplex, blink activity

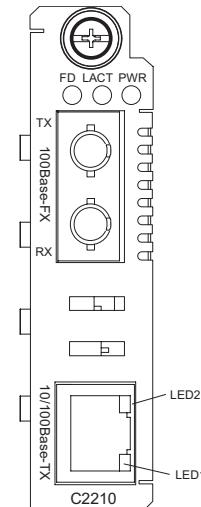

Product features

AutoCross™


The AutoCross feature detects and configures the twisted-pair copper port on the C2210 SIC for the correct straight-through (MDI) or crossover (MDI-X) configuration. This feature allows either MDI or MDI-X cable to connect the SIC to devices such as hubs, transceivers, or network interface cards (NICs). (*This feature does not require operator intervention.*)

Operation — Continued

Product features — continued


Link pass-through

The Link Pass-Through feature allows the SIC to monitor RX (*receive*) ports for loss of signal. In the event of a loss of an RX signal on one media port, the SIC will automatically disable the TX (*transmit*) signal of the other media port, thus “passing through” the link loss.

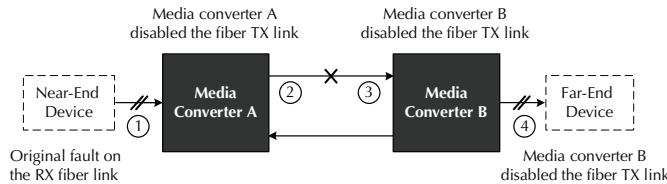

Far-end fault

When a fault occurs on an incoming fiber link (1), the SIC transmits a Far-End Fault signal on the outgoing fiber link (2). In addition, the Far-End Fault signal also activates Link Pass-Through, which, in turn, disables the link on the copper portion of the network (3) and (4).

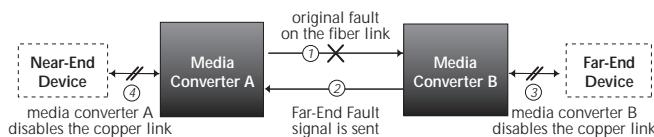

Auto-Negotiation

The Auto-Negotiation feature allows the C2210 SIC to automatically configure itself to achieve the best possible mode of operation over a link. The SIC will broadcast its speed (*10 Mbps or 100 Mbps*) and duplex capabilities (*full or half*) to the other devices and negotiates the best mode of operation. Auto-Negotiation allows quick and easy installation because the optimal link is established automatically. No user intervention is required to determine the best mode of operation.

A scenario where the SIC is linked to a non-negotiating device, you may want to disable Auto-Negotiation. In this instance, the mode of operation will drop to the least common denominator between the two devices (*e.g. 100 Mbps, half duplex*). Disabling this feature gives the user the ability to force the connection to the best mode of operation.

Parallel detection

Parallel detection is the method used to link when an auto negotiating port detects a link partner that is in forced mode and therefore cannot participate in the auto negotiating process. Parallel Detection can be set to IEEE Standard half duplex, or the non-standard full duplex. Switch settings for parallel detection are valid in hardware or software mode, only when Auto-Negotiation is enabled.

Operation — Continued

Product features — continued

Parallel detection — continued

Per the IEEE method, an auto negotiating port that detects a forced link partner should drop to the detected speed (*10Mbps or 100Mbps*) and default to HALF DUPLEX.

The C2210 allows bypassing the IEEE method by setting the parallel detection default mode to half or full duplex DIP SW 3, disabling SW 1, auto-negotiation and configuring SW 2, speed.

Full duplex network

In a full duplex network, maximum cable lengths are determined by the type of cables that are used.

Half duplex network (512-Bit Rule)

In a half duplex network, the maximum cable lengths are determined by the round trip delay limitations of each Fast Ethernet collision domain. (*A collision domain is the longest path between any two terminal devices, e.g., a terminal, switch, or router, etc.*)

The 512-Bit Rule determines the maximum length of cable permitted by calculating the round-trip delay in bit-times (BT) of a particular collision domain. If the result is less than or equal to 512 BT, the path is good.

For more information on the 512-Bit Rule, see the white paper titled “Collision Domains” on-line at: www.transition.com

SNMP

See the on-line documentation that comes with Transition Networks FocalPoint™ software for applicable commands and usage.

Use SNMP at an attached terminal or at a remote location to monitor the SIC by monitoring:

- Power
- Serial and part number
- Port number
- Copper and fiber link status
- Copper and fiber duplex mode
- Copper port speed
- Hardware switch setting

Also, use SNMP to enter network commands that do the following:

- Enable/disable Auto-Negotiation on copper
- Force 10Mbps or 100Mbps on copper
- Force full duplex or half duplex on copper
- Force full duplex or half duplex on fiber
- Enable/disable Far-End Fault on fiber
- Enable/disable Link Pass Through
- Enable/disable Pause

Cable Specifications

The physical characteristics must meet or exceed IEEE 802.3™ specifications.

Fiber cable

Bit Error Rate:	<10-9
Single mode fiber (<i>recommended</i>):	9 µm
Multimode fiber (<i>recommended</i>):	62.5/125 µm
Multimode fiber (<i>optional</i>):	50/125 µm
C2210-1011	1300 nm multimode
Fiber Optic Transmitter Power:	min: -19.0 dBm max: -14.0 dBm
Fiber Optic Receiver Sensitivity:	min: -30.0 dBm max: -14.0 dBm
Link Budget:	11.0 dB
C2210-1013	1300 nm multimode
Fiber Optic Transmitter Power:	min: -19.0 dBm max: -14.0 dBm
Fiber Optic Receiver Sensitivity:	min: -30.0 dBm max: -14.0 dBm
Link Budget:	11.0 dB
C2210-1014	1300 nm single mode
Fiber-optic Transmitter Power:	min: -15.0 dBm max: -8.0 dBm
Fiber-optic Receiver Sensitivity:	min: -31.0 dBm max: -8.0 dBm
Link Budget:	16.0 dB
C2210-1015	1300 nm single mode
Fiber-optic Transmitter Power:	min: -5.0 dBm max: -2.0 dBm
Fiber-optic Receiver Sensitivity:	min: -34.0 dBm max: -7.0 dBm
Link Budget:	29.0 dB
C2210-1016	1300 nm single mode
Fiber-optic Transmitter Power:	min: -5.0 dBm max: 0.0 dBm
Fiber-optic Receiver Sensitivity:	min: -34.0 dBm max: -7.0 dBm
Link Budget:	29.0 dB
C2210-1017	1550 nm single mode
Fiber-optic Transmitter Power:	min: -5.0 dBm max: 0.0 dBm
Fiber-optic Receiver Sensitivity:	min: -34.0 dBm max: -7.0 dBm
Link Budget:	29.0dB
C2210-1019	1300 nm single mode
Fiber-optic Transmitter Power:	min: -15.2 dBm max: -8.0 dBm
Fiber-optic Receiver Sensitivity:	min: -32.5 dBm max: -3.0 dBm
Link Budget:	17.3 dB
C2210-1035	1550 nm single mode
Fiber-optic Transmitter Power:	min: -0.0 dBm max: -8.0 dBm
Fiber-optic Receiver Sensitivity:	min: -36.0 dBm max: -3.0 dBm
Link Budget:	36.0 dB
C2210-1039	1300 nm multimode
Fiber-optic Transmitter Power:	min: -19.0 dBm max: -8.0 dBm
Fiber-optic Receiver Sensitivity:	min: -30.0 dBm max: -3.0 dBm
Link Budget:	11 dB

Cable Specifications — Continued

C2210-1029-A1	1310 nm TX/1550 nm RX single mode
C2210-1029-A2	1550 nm TX/1310 nm RX single mode
Fiber Optic Transmitter Power:	min: -14.0 dBm max: -8.0 dBm
Fiber Optic Receiver Sensitivity:	min: -33.0 dBm max: -3.0 dBm
Link Budget:	19.0 dB
C2210-1029-B1	1310 nm TX/1550 nm RX single mode
C2210-1029-B2	1550 nm TX/1310 nm RX single mode
Fiber Optic Transmitter Power:	min: -8.0 dBm max: -3.0 dBm
Fiber Optic Receiver Sensitivity:	min: -33.0 dBm max: -3.0 dBm
Link Budget:	25.0 dB

The fiber optic transmitters on this device meet Class I Laser safety requirements per IEC-825/CDRH standards and comply with 21 CFR1040.10 and 21CFR1040.11.

Copper cable

Category 3: (*Minimum requirement for 10 Mb/s operation*)

Gauge 24 to 22 AWG



Attenuation 11.5 dB/100m @ 5-10 MHz

Category 5: (*Minimum requirement for 100 Mb/s operation*)

Gauge 24 to 22 AWG

Attenuation 22.0 dB /100m @ 100 MHz

- Straight-through (MDI) or crossover (MDI-X) twisted-pair cable must be used.
- Shielded twisted-pair (STP) or unshielded twisted-pair (UTP) may be used.
- Pins 1&2 and 3&6 are the two active pairs in an Ethernet network .
- Use only dedicated wire pairs for the active pins:
(e.g., blue/white & white/blue, orange/white & white/orange, etc.)
- Do not use flat or silver satin wire.

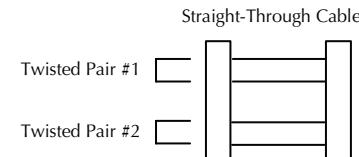

Technical Specifications

For use with Transition Networks Model C2210 or equivalent.

Data Rate:	10 Mb/s, 100 Mb/s
Dimensions:	3.4" x 6.5" x 0.86" (86 mm x 165 mm x 22 mm)
Weight:	1 lb. (0.45 kg approximate)
Power Consumption:	2.5 Watts, 200mA, 13.9VDC
MTBF:	greater than 250,000 hours MIL-HDBK-217F greater than 667,500 hours Bellcore
Packet Size:	Unicast MAC address: 1K Maximum packet size: - 2048 bytes untagged bytes - 2044 bytes tagged bytes
Frame Buffer Memory:	512 Kbit
Environment:	See chassis specifications Storage Temp: -25 to 65°C (-13 to 149°F) Humidity 10 to 90%, non-condensing
Warranty:	Lifetime

The information in this user's guide is subject to change. For the most up-to-date information on the C2210 SIC, view the user's guide on-line at: www.transition.com

CAUTION: Visible and invisible laser radiation when open. Do not stare into beam or view directly with optical instruments.

CAUTION: Use of controls, adjustments or the performance of procedures other than those specified herein may result in hazardous radiation exposure.

The fiber optic transmitters on this device meet Class I Laser safety requirements per IEC-825/CDRH standards and comply with 21 CFR1040.10 and 21CFR1040.11.

CAUTION: Copper based media ports, e.g., Twisted Pair (TP) Ethernet, USB, RS232, RS422, RS485, DS1, DS3, Video Coax, etc., are intended to be connected to intra-building (*inside plant*) link segments that are not subject to lightning transients or power faults. Copper based media ports, e.g., Twisted Pair (TP) Ethernet, USB, RS232, RS422, RS485, DS1, DS3, Video Coax, etc., are NOT to be connected to inter-building (*outside plant*) link segments that are subject to lightning transients or power faults. Failure to observe this caution could result in damage to equipment.

Troubleshooting

If the C2210 SIC fails, isolate and correct the failure by determining the answers to the following questions and then taking the indicated action:

1. Is the PWR (*power*) LED illuminated?
NO
 - Is the SIC inserted properly into the chassis?
 - Is the power cord properly installed in the chassis and in to the external power source; is the external power source active?
 - Contact Technical Support: US/Canada: 1-800-260-1312, International: 00-1-952-941-7600.
 YES
 - Proceed to step 2.
2. Is the TLNK (*twisted-pair link*) LED illuminated?
NO
 - Check the copper cables for proper connection and pin assignment.
 - Contact Technical Support: US/Canada: 1-800-260-1312, International: 00-1-952-941-7600.
 YES
 - Proceed to step 3.
3. Is the FLNK (*fiber link*) LED illuminated?
NO
 - Check the fiber cable for proper connection.
 - Verify that the TX and RX cables are connected to the RX and TX ports, respectively, on the 100Base-FX device.
 - Contact Technical Support: US/Canada: 1-800-260-1312, International: 00-1-952-941-7600.
 YES
 - Proceed to step 4.
4. Is the TPSD (*twisted-pair speed*) LED illuminated?
NO
 - Check the copper cables for proper connection.
 - Off = The SIC has selected 10Mbps operation.
 - If the speed is not correct, disconnect and reconnect the twisted pair cable to restart the initialization process.
 - Contact Technical Support: US/Canada: 1-800-260-1312, International: 00-1-952-941-7600.
 YES
 - On = The SIC has selected 100Mbps operation.
 - If the speed is not correct, disconnect and reconnect the twisted pair cable to restart the initialization process.
 - Contact Technical Support: US/Canada: 1-800-260-1312, International: 00-1-952-941-7600.

Contact Us

Technical support

Technical support is available 24 hours a day.

US and Canada: 1-800-260-1312

International: 00-1-952-941-7600

Transition now 6:30AM to 5:30PM CST

Chat live via the Web with Transition Networks Technical Support.

Log onto www.transition.com and click on the TechSupport/Transition Now link.

Web-based seminars

Transition Networks provides seminars via live web-based training.

Log onto www.transition.com and click the Learning Center link.

E-Mail

Ask a question anytime by sending an e-mail to our technical support staff.

techsupport@transition.com

Address

Transition Networks

10900, Red Circle Drive, Minnetonka MN 55343, U.S.A.

telephone: 952-941-7600, toll free: 800-526-9267, fax: 952-941-2322



Declaration of Conformity

Name of Mfg:

Transition Networks
10900 Red Circle Drive, Minnetonka MN 55343 U.S.A.

Model Number(s):

C2210-I011, C2210-I013, C2210-I014, C2210-I015, C2210-I016,
C2210-I017, C2210-I019, C2210-I035, C2210-I039, C2210-I029-A1,
C2210-I029-A2, C2210-I029-B1, C2210-I029-B2, C2210-I040

Purpose: To declare that the C2210 series SICs to which this declaration refers is in compliance with the following directive(s) and standard(s):

EMC Directive 2004/108/EC; EN 55022:2006+A1:2007 Class A;
EN55024:1998+A1:2001+A2:2003; EN61000-3-2; EN61000-3-3; CFR Title 47 Part
15 Subpart B Class A; Low Voltage Directive: 2006/95/EC; CFR Title 21 Section
1040.10 Class I.

I, the undersigned, hereby declare that the model number(s) listed in this declaration of conformity are in compliance with the directive(s) and standard(s) herein.

Stephen Anderson

Stephen Anderson, Vice-President of Engineering

March, 2010
Date

Compliance Information

FCC regulations

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at the user's own expense.

Canadian regulations

This digital apparatus does not exceed the Class A limits for radio noise for digital apparatus set out on the radio interference regulations of the Canadian Department of Communications.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la Class A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

European regulations

Warning This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Achtung! Dieses ist ein Gerät der Funkstörgrenzwertklasse A. In Wohnbereichen können bei Betrieb dieses Gerätes Rundfunkstörungen auftreten. In diesem Fall ist der Benutzer für Gegenmaßnahmen verantwortlich.

Attention! Ceci est un produit de Classe A. Dans un environnement domestique, ce produit risque de créer des interférences radioélectriques, il appartiendra alors à l'utilisateur de prendre les mesures spécifiques appropriées.



CAUTION: RJ connectors are NOT INTENDED FOR CONNECTION TO THE PUBLIC TELEPHONE NETWORK. Failure to observe this caution could result in damage to the public telephone network.

Der Anschluss dieses Gerätes an ein öffentliches Telekommunikationsnetz in den EG-Mitgliedstaaten verstößt gegen die jeweiligen einzelstaatlichen Gesetze zur Anwendung der Richtlinie 91/263/EWG zur Angleichung der Rechtsvorschriften der Mitgliedstaaten über Telekommunikationseinrichtungen einschließlich der gegenseitigen Anerkennung ihrer Konformität.



In accordance with European Union Directive 2002/96/EC of the European Parliament and of the Council of 27 January 2003, Transition Networks will accept post usage returns of this product for proper disposal. The contact information for this activity can be found in the 'Contact Us' portion of this document.

Trademark notice

All trademarks and registered trademarks are the property of their respective owners.

Copyright restrictions

© 2010 Transition Networks.

All rights reserved. No part of this work may be reproduced or used in any form or by any means - graphic, electronic, or mechanical - without written permission from Transition Networks.

Printed in the U.S.A.