

User Guide

TN-SFP-xxx



Transceiver Modules

- Hot-Pluggable SFP LC Optical Transceivers
- Digital Diagnostic Function
- Class 1 Laser International Safety Standard IEC-60825 Compliant
- Compatible with Small Form Factor Pluggable Multi-Sourcing Agreement (MSA)

Contents

Introduction.....	1
Description	1
Specifications and Standards.....	2
Optical Specifications.....	2
Application: Fiber Connections with SFPs	2
SFP Unpacking	3
SFP Installation	3
Cautions.....	3
Installing an SFP Module.....	4
Fiber Cable Physical Characteristics	5
Connecting Fiber Cables	5
Removing an SFP Module.....	5
Diagnostic Monitoring Interface (DMI)	6
DDMI (Digital Diagnostics Monitoring Interface)	7
Contact Us.....	8
For More Information.....	8
Compliance Information	8
Record of Revisions	9

Introduction

The Transition Networks TN-SFP-xxx series small form factor pluggable (SFP) transceiver modules are designed to install in any SFP slot, and connect multimode 1000Base-SX or single mode 1000Base-LX fiber-optic cable to the network through the SFP connector. The TN-SFPxxx transceivers are designed for bi-directional, serial-optical data communications such as Gigabit Ethernet and fiber channel at speeds up to 4.25 Gbps.

Description

All of Transition’s SFPs and XFPs are compliant with the Multi-Sourcing Agreement (MSA) ensuring interoperability with all other MSA compliant networking devices.

Simplex LC SFPs	Duplex LC SFPs
100BASE-FX/OC-3	100BASE-FX/OC-3
OC-12/STM-4	OC-12/STM-4
1000BASE-BX	1000BASE-SX
1000BASE-SX	1000BASE-LX
1000BASE-LX	OC-48/STM-16/ Fibre Channel 1x/2x/4x/1000BASE-X
100/1000Base-LX dual speed	Fibre Channel 1x/2x/4x/1000BASE-X Copper SFP

Specifications and Standards

The TN-SFP-xxx was designed to meet these standards and specifications:

Standards	IEEE 802.3 2003; ANSI X3.297-1997
Compliance	IEC-60825; FDA 21; CFR 1040.10 and 1040.11
Dimensions	Width: 0.52" [13 mm] x Depth: 2.18" [55 mm] x Height: 0.33" [8 mm]
Power	3.3V
Power Consumption	0.66 watts
Environment	0°C – 70°C
Shipping Weight	1 lb. (454 g) approximately
Voltage	3.3 volts
Operating Temp	-10°C – 85°C: TN-SFP-SX, TN-SFP-SXD, TN-SFP-LX1, TN-SFP-ESX5 , TN-SFP-OC3S3, TN-SFP-ESX6, TN-SFP-FC2XM, TN-SFP-FC2XS2.
Operating Temp	0°C – 70°C: TN-SFP-ELX1, TN-SFP-LX3, TN-SFP-LX5, TN-SFP-LX8, TN-SFP-LX12, TN-SFP-Ocx, TN-SFP-LX16, TN-SFP-LX20, TN-SFP-LXBxx, TN-SFP-FC4Xxx, TN-SFP-FC2XS40, TN-SFP-FC2XS15, TN-SFP-TX, TN-SFP-T-MG, TN-SFP-GE-100FX.
Operating Temp	-20°C – 85°C: TN-SFP-STM1E.
Operating Temp	-40°C to 85°C: TN-SFP-LX1T, TN-SFP-LX3T, TN-SFP-LXB11T, TN-SFP-LXB12T, TN-SFP-LXB21T, & TN-SFP-LXB22T.
Storage Temp	-40°C to 85°C (-40° to 185°F)
MTBF	At Ambient Temp. 85 °C: 600,000 Hrs. At Ambient Temp. 80 °C: 730,964 Hrs.
Warranty	Lifetime


Transition Networks' SFP modules fully comply with Multi-Sourcing Agreement (MSA). This compliance allows our SFP modules to be used in other MSA compliant SFP platforms without any problems.

Optical Specifications

Optical specs for all Transition Networks' SFPs are at <https://www.transition.com/lines/optical-devices/>.

Application: Fiber Connections with SFPs

SFPs are used with Gigabit Ethernet Switches and Routers, Fibre Channel Switch Infrastructure, xDSL applications, Metro Edge Switching, etc.

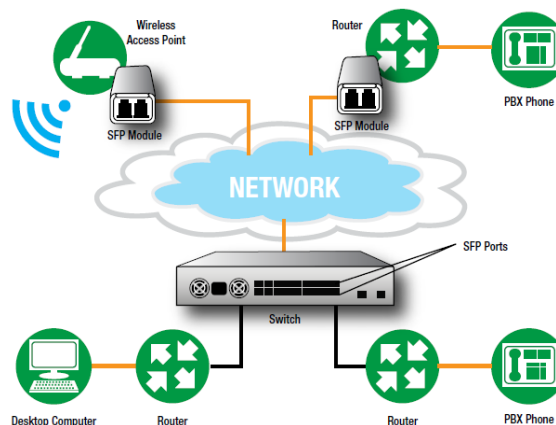

SFP Unpacking

Before you start installing the TN-SFP-xxx, verify that the package contains the following items:

- One TN-SFP-xxx
- Two protective foam pieces
- One Documentation Postcard

Notify your sales representative immediately if any of the aforementioned items is missing or damaged. Save the packaging for possible future use.



SFP Installation


Cautions

- The SFP transceiver module is keyed to only be installed one way. However, if forced the wrong way, damage may occur.
- Avoid getting dust or other contaminants into the fiber bore of the SFP transceiver module, as this will cause the optics to not operate properly.
- Clean the optic surfaces of the optical fiber before you plug them back in to the optical bores of another SFP transceiver module. See the Fiber Optic Association, Inc. Cleaning Fiber Optic Connections page on the FOA website at www.thefoa.org/tech/ref/termination/cleaning.html for more information.
- Each port must match the wavelength specifications on the other end of the cable, and the cable must not exceed the specified cable length for reliable communications.


Note that the NM2-FXS-2230-SFP-01 SFP transceiver is sold separately and also as a part of Transition Networks' NM2-FXS-2230-SFP-01 M.2 100-Base-FX Ethernet Fiber NIC. See the NM2-FXS-2230-SFP-01 manual for more information on the SFP bundled with the M.2 NIC.

Installing an SFP Module

1. Attach an ESD-preventive wrist strap to your wrist and to the ESD ground connector or a bare metal surface on your chassis.
2. Remove the SFP transceiver module from its protective packaging. Note: Do not remove the optical bore dust plugs until directed to do so in a later procedure.
3. Check the slot orientation. Note that for some devices (e.g., S4224) some slots are “upside down” compared to other slots.
4. Position the SFP device at the desired installation slot, with the label facing correctly.
5. Carefully slide the SFP device into the slot, aligning it with the internal installation guides.

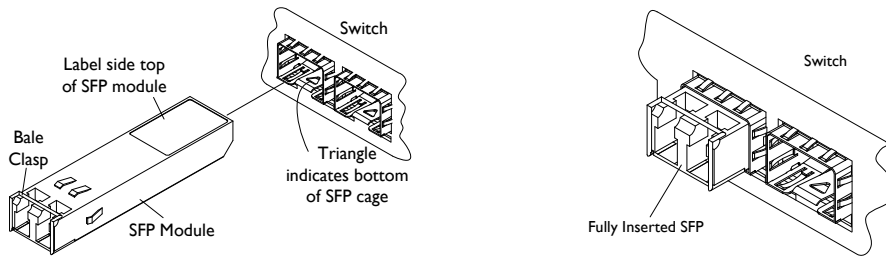

6. Ensure that the SFP device is firmly seated against the internal mating connector. To verify that the SFP is seated and latched properly:
 - a) Grasp the SFP by the sides and try to remove it without releasing the latch.
 - b) If the SFP can not be removed, it is installed and seated properly. If the SFP can be removed, reinsert it and press harder with your thumb; repeat if necessary until it is latched securely into the socket.

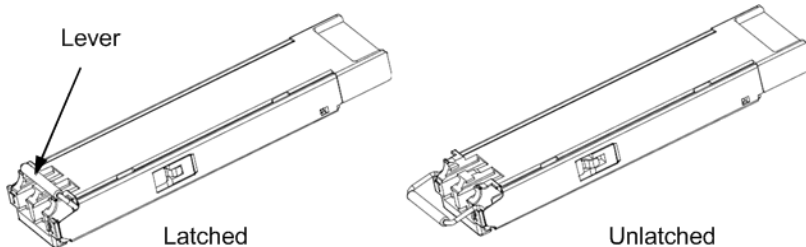

7. Connect the fiber cable to the fiber port connector of the SFP device. Make sure the SFP release latch is in the up (closed) position when you insert the cable connector into the SFP.
8. Remove the dust plug from the connector. Save the dust plug for future use.
9. Attach an appropriate cable into the SFP module port.
10. Attach the other end of the cable into the other device.
11. Observe the status LED(s). See the related manual for details.

Fiber Cable Physical Characteristics

The fiber cable physical characteristics must meet or exceed IEEE 802.3ae specifications:


- Single mode fiber (recommended): 9 μm
- Multimode fiber (recommended): 62.5/125 μm
- Multimode fiber (optional): 100/140, 85/140, 50/125 μm
- MMF Media TN-SFP-GE-100FX: 1310 nm

Warning: Visible and invisible laser radiation when open. DO NOT stare into laser beam or view directly with optical instruments. Failure to observe this warning could result in damage to your eyes or blindness.

Connecting Fiber Cables

To install the fiber cable, do the following:

1. Locate the appropriate fiber cable.
2. Install the cable as shown below.

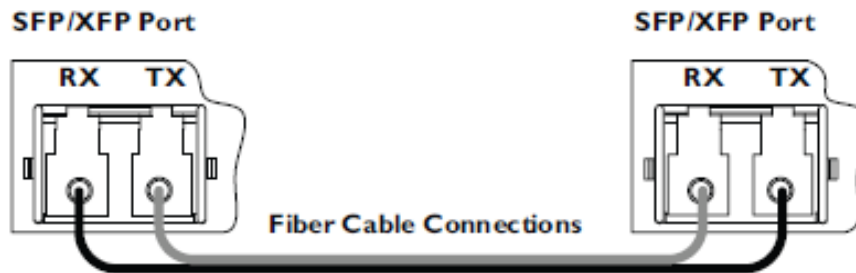

Removing an SFP Module

Caution: Be careful when removing the SFP or SFP+ from a device. Some SFP transceiver module temperatures may exceed 160°F (70°C) and be too hot to touch with bare hands. **Note:** Do not remove and replace the SFP modules more often than necessary; excessive SFP removing and replacing can shorten the SFPs useful life.

1. Attach an ESD-preventive wrist strap to your wrist and to the ESD ground connector or a bare metal surface on your chassis.
2. For future reattachment of fiber-optic cables, note which connector plug is send (TX) and which is receive (RX).
3. Remove the SFP transceiver module:
 - a. If the SFP transceiver module has an **actuator button latch**, gently press the actuator button on the front of the SFP transceiver module until it clicks and the latch mechanism releases the SFP transceiver module from the socket connector. Grasp the actuator button between your thumb and index finger, and carefully pull the SFP transceiver module straight out of the module slot.
 - b. If the SFP transceiver module has a **bail clasp latch**, pull the latch out and down to eject the SFP transceiver module from the socket connector. If the bail clasp latch is obstructed and you cannot use your index finger to open it, use a small, flat-blade screwdriver or other long, narrow instrument to open the bail clasp latch. Grasp the SFP transceiver module between your thumb and index finger, and carefully remove it from the socket.
4. Replace the Dust Plug.
5. Place the removed SFP/SFP+ transceiver module in an antistatic bag or other protective package.

Diagnostic Monitoring Interface (DMI)

The following DMI port screen and explanation table contains brief definitions of the DMI support offered on some (SFP Transceiver Modules. For further information, see the help option on the CPSMM-xxx, SNMP agent, or Transition Networks Focal Point or ION System GUI. **Note:** This feature is not available on all devices and may vary between products. See the related manual for more information.

The screenshot shows the DMI interface with the following data:

- DMI RX Power:** 210 uW, -6.778 dBm. Alarm status: Normal (green).
- DMI Temp:** 30.1 °C, 86.2 °F. Alarm status: Normal (green).
- DMI Bias Current:** 20 uA. Alarm status: Normal (grey).
- DMI TX Power:** 0 uW, 0.000 dBm. Alarm status: Normal (grey).
- Rx Power Intrusion Threshold:** 1000 uW, 0.000 dBm. Status: Intrusion Detected (red).

DMI Parameter	Description
DMI Rx Power	Measured receive optical power in microwatts and in decibels relative to 1mW.
DMI Rx Power Alarm	Alarm status of measured receive optical power.
DMI Temp	Internally measured temperature of transceiver in degrees Celsius and degrees Fahrenheit.
DMI Temp Alarm	Alarm status for internally measured temperature of the transceiver.
DMI Bias Current	Measured transmit bias current in microamperes.
DMI Bias Alarm	Alarm status for measured transmit bias current for the interface.
DMI Tx Power	Measured transmit power in microwatts and in decibels relative to 1mW.
DMI Tx Power Alarm	Alarm status of measured transmit power.
Rx Power Intrusion Threshold	Tells the converter to stop passing traffic when the receive power drops below the new threshold. This feature is sometimes referred to as 'Intrusion Detection,' since tapping into a fiber to intercept traffic leads to a reduction in receive power. This value can be entered in microwatts or in decibels relative to 1mW.

TN-SFP distances, TX power, RX power, and link budgets can be found on Transition Networks' website, document "SFP/XFP Fiber and Copper Connectors at <https://www.transition.com/lines/optical-devices/>.

The fiber optic transmitters on this device meet Class I Laser safety requirements per IEC-825/CDRH standards and comply with 21 CFR1040.10 and 21CFR1040.11.

WARNING: Visible and invisible laser radiation when open. Do not stare into the beam or view the beam directly with optical instruments. Failure to observe this warning could result in an eye injury or blindness.

IMPORTANT: Copper based media ports such as Twisted Pair (TP) Ethernet, USB, RS232, RS422, RS485, DS1, DS3, Video Coax, etc., are intended to be connected to intra-building (inside plant) link segments that are not subject to lightning transients or power faults. Copper-based media ports such as Twisted Pair (TP) Ethernet, USB, RS232, RS422, RS485, DS1, DS3, Video Coax, etc., are NOT to be connected to inter-building (outside plant) link segments that are subject to lightning transients or power faults.

DDMI (Digital Diagnostics Monitoring Interface)

DDMI (Digital Diagnostics Monitoring Interface) provides enhanced digital DMI for optical transceivers which allows real time access to device operating parameters.

The following DMI port screen and explanation table contains brief definitions of the DDMI support offered on some Small Form Factor Pluggable (SFP) Transceiver Modules. For further information, see the help option or User Guide for the S3290, S4140, S4212, and S4224. **Note:** This feature is not available on all devices and may vary between products. See the related manual for more information.

The screenshot shows the web interface for a Transition Networks S4224 device. The left sidebar contains a navigation menu with options like System, Ports, Link OAM, DHCP, Security, LACP, Loop Protection, Spanning Tree, MVR, IPMC, LLDP, Ethernet Services, Performance Monitor, PTP, MAC Table, VLANs, DDMI (Overview, Detailed), UDLD, and Diagnostics. The main content area is titled 'S4224 - Carrier Ethernet Network Interface Device' and includes a 'Port 27' dropdown, 'Auto-refresh' checkbox, and a 'Refresh' button. Two sections are visible: 'Transceiver Information' and 'DDMI Information'.

Transceiver Information	
Vendor	Transition
Part Number	TN-10GSFP-LR1
Serial Number	8800022
Revision	0001
Date Code	2011-08-09
Transceiver	10G

DDMI Information						
Type	Current	High Alarm Threshold	High Warn Threshold	Low Warn Threshold	Low Alarm Threshold	
Temperature(C)	52.875	85.000	80.000	0.000	-5.000	
Voltage(V)	3.2600	3.6000	3.5000	3.1000	3.0000	
Tx Bias(mA)	38.896	90.000	80.000	4.000	2.000	
Tx Power(mW)	0.5624	1.4125	1.1220	0.1585	0.1259	
Rx Power(mW)	0.0000	--	1.4125	1.1220	0.0363	0.0229
Tx Power(dBm)	-2.50	1.50	0.50	-8.00	-9.00	
Rx Power(dBm)	-inf	1.50	0.50	-14.40	-16.40	

The Transceiver Information and DDMI Information sections are described below.

DDMI Parameter	Description
DMI	Rx Power (uW) Intrusion Threshold; a level for Rx Power on the Fiber port. If the DMI read value falls below the preset value, an intrusion is detected, and a trap is generated. The default is 0 uW. The range is 0 - 65,535 uW.
Port	The device's port number.
Vendor	The SFP vendor's name (e.g., <i>Transition</i>).
Part Number	The SFP vendor Part number provided by the SFP vendor (<i>TN-10GSFP-SR</i>).
Serial Number	The SFP Vendor Serial number provided by the SFP vendor (e.g., <i>8672105</i>).
Revision	The SFP vendor Revision level for part number provided by the SFP vendor.
Data Code	The vendor's manufacturing date code (e.g., <i>2011-08-09</i>).
Transceiver	The Transceiver compatibility (e.g., <i>1000BASE_SX</i> or <i>10G</i>).
Current	The current value of temperature, voltage, TX bias, TX power, and RX power.
High Alarm Threshold	The high alarm threshold value of temperature, voltage, TX bias, TX power, and RX power.
High Warn Threshold	The high warn threshold value of temperature, voltage, TX bias, TX power, and RX power.
Low Warn Threshold	The low warn threshold value of temperature, voltage, TX bias, TX power, and RX power.
Low Alarm Threshold	The low alarm threshold value of temperature, voltage, TX bias, TX power, and RX power.

Contact Us

Technical Support

Technical support is available 24-hours a day

US and Canada: 1-800-260-1312

International: 00-1-952-941-7600

Main Office

tel: +1.952.941.7600 | toll free: 1.800.526.9267 | fax: 952.941.2322

sales@transition.com | techsupport@transition.com | customerservice@transition.com

Address

Transition Networks

10900 Red Circle Drive

Minnetonka, MN 55343, U.S.A.

For More Information

Technical information in this document is subject to change without notice. For more information see Transition Networks [Optical Devices](#) webpage.

Compliance Information

Class I Laser Compliance

This product has been tested and found to comply with the limits for FDA Class I laser for IEC60825, EN60825, and 21CFR1040 specifications.

Translated Safety Warnings

Warning Class I laser product.

Waarschuwing Klasse-I laser produkt.

Varoitus Luokan I lasertuote.

Attention Produit laser de classe I

Warnung Laserprodukt der Klasse I.

Avvertenza Prodotto laser di Classe I.

Advarsel Laserprodukt av klasse I.

Aviso Produto laser de classe I.

¡Advertencia! Producto láser Clase I.

Varning! Laserprodukt av klass I.

Aviso Produto a laser de classe I.

Advarsel Klasse I laserprodukt.

FCC Regulations

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications.

Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at the user's own expense.

Canadian Regulations

This digital apparatus does not exceed the Class A limits for radio noise for digital apparatus set out on the radio interference regulations of the Canadian Department of Communications.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la Class A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

European Regulations

Warning

This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Achtung !

Dieses ist ein Gerät der Funkstörgrenzwertklasse A. In Wohnbereichen können bei Betrieb dieses Gerätes Rundfunkstörungen auftreten. In diesem Fall ist der Benutzer für Gegenmaßnahmen verantwortlich.

Attention !

Ceci est un produit de Classe A. Dans un environnement domestique, ce produit risque de créer des interférences radioélectriques, il appartiendra alors à l'utilisateur de prendre les mesures spécifiques appropriées.



In accordance with European Union Directive 2002/96/EC of the European Parliament and of the Council of 27 January 2003, Transition Networks will accept post usage returns of this product for proper disposal. The contact information for this activity can be found in the '[Contact Us](#)' portion of this document.

Der Anschluss dieses Gerätes an ein öffentliches Telekommunikationsnetz in den EGMitgliedstaaten verstösst gegen die jeweiligen einzelstaatlichen Gesetze zur Anwendung der Richtlinie 91/263/EWG zur Angleichung der Rechtsvorschriften der Mitgliedstaaten über Telekommunikationsendeinrichtungen einschliesslich der gegenseitigen Anerkennung ihrer Konformität.



CAUTION: RJ connectors are NOT INTENDED FOR CONNECTION TO THE PUBLIC TELEPHONE NETWORK. Failure to observe this caution could result in damage to the public telephone network.

Der Anschluss dieses Gerätes an ein öffentliches Telekommunikationsnetz in den EGMitgliedstaaten verstösst gegen die jeweiligen einzelstaatlichen Gesetze zur Anwendung der Richtlinie 91/263/EWG zur Angleichung der Rechtsvorschriften der Mitgliedstaaten über Telekommunikationsendeinrichtungen einschliesslich der gegenseitigen Anerkennung ihrer Konformität.

Record of Revisions

Rev	Date	Notes
A	9/30/13	Initial release.
B	4/27/16	Revised operating temperatures, updated contact information and format.
C	11/22/16	Update MTBF and contact information.
D	6/5/17	Added TN-SFP-GE-100FX information.

Trademarks: All trademarks and registered trademarks are the property of their respective owners.

Copyright restrictions: © 2003-2017 Transition Networks. All rights reserved. No part of this work may be reproduced or used in any form or by any means - graphic, electronic or mechanical - without written permission from Transition Networks.