

FOX Series

Telematics Gateway



SECURE INTELLIGENT TELEMETRY GATEWAY

The Lantronix FOX series is an ideal solution for securely transforming telemetry data from assets such as field equipment and fleet vehicles into actionable insights. When paired with Lantronix Perception™ software, it streamlines complex device management tasks, including true zero-touch provisioning, enhancing efficiency and minimizing errors.

The Complete Package to Successfully Deploy Your IoT and Telematics Projects

Having an integration between hardware, connectivity, accessories, and ability to adapt to different field equipment is a critical success factor for all projects depending on telemetry data. Lantronix FOX, a secure intelligent telemetry gateway, combines flexible edge data acquisition and processing, and optimizes the data transmission with the back-office systems. Perception™ device management system automates and simplifies device life cycle management, provides real-time monitoring and APIs for easy integration.

Multiple Hardware Interfaces to Connect Your Field Equipment

The FOX series gateways are equipped with diverse set of inputs and outputs and support a wide range of fieldbus protocols. The gateways support cellular connectivity and integrated GNSS technology enables location-based feature sets. Designed for deployment in intricate industrial settings or challenging urban landscapes, the FOX series operates seamlessly with internal or external antennas, significantly streamlining logistics, installation, and ongoing support.

Protect and Process Data at the Edge

Push intelligence to the edge by leveraging the Lantronix PFAL scripting language or widely adopted LUA language. Edge intelligence allows faster reaction to changing conditions compared to cloud-only solutions. It can also reduce the total cost of ownership, when cellular data usage can be optimized by pre-processing and normalizing the data at the edge. FOX series gateways expedite the integration to IoT Platforms by supporting MQTT, Azure, and REST APIs.

Perception™ Centralized Device Management Platform


With the ready-to-use software platform, monitor, manage, and control your devices from anywhere, anytime. The Perception platform provides software-defined automation across all your devices and the capture of device telemetry data for event management and analytics.

FOX Applied to Critical Infrastructure

- User configurable Multi-platform communication
- Data decoding and buffering
- Remote zero-touch provisioning through Perception™
 - Firmware
 - Configuration
 - Certificate

FOX Highlights

- Send only the data you need to the cloud with the FOX edge processing and local data storage to reduce your recurring cost and ensure the fastest response time from your device.
- Secure critical data from cyber-attacks using advanced encryption such as AES, SSL/TLS 1.3.
- Collect vehicle information such as tachograph (FMS), RPM (x1000), temperature, and fuel levels with high accuracy.
- Support for common fieldbuses like Modbus and others using RS-232/485 interfaces.
- Collect ID, buzz, magnetic detection, movement, and temperature using Lantronix BLE sensors, or bring your own.

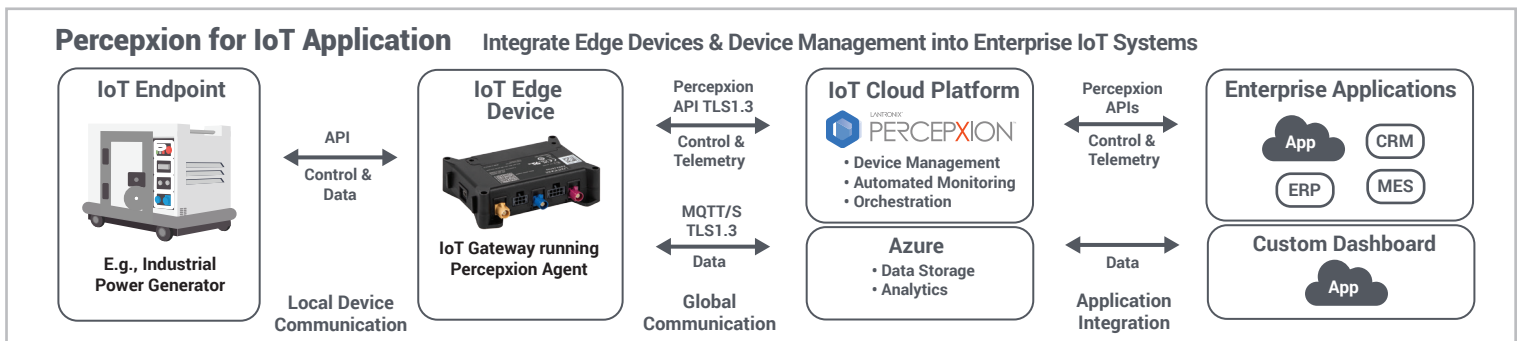

General		Electrical Characteristics		Interfaces	
4G LTE, with 2G fallback: (refer to the table below)		Power supply: +10.8 V~60 V DC		3 x Digital/analog IO ports (user-configurable)	
Internet (TCP/UDP/HTTP/SMTP)		Internal 1000 mAh rechargeable battery ¹⁾		1 x Predefined digital input (Ignition)	
Multi channel GNSS (GPS/Galileo/GLONASS)		Average Power Consumption		3 x LED indicators (user-configurable)	
Dead Reckoning variants		Normal operation: 50mA @ 12 VDC		2 x RS-232 Ports or 1x RS-232 1x RS-485 variants	
A-GPS (online/offline/autonomous)		Sleep mode: < 1mA @ 12 VDC		1 x 10pin Mini-USB connector (for IOBOX-MINI ¹⁾ , IOBOX-CAN ¹⁾)	
Protocols: NMEA, PFAL (binary)		Environmental Data		1 x 1-Wire interface (incl. 5V Phantom Power)	
Accuracy:	GPS GLONASS	Operating temp.: -40°C to +85°C		1 x I ² C interface	
Position:	2.5 m 4.0 m	Storage temp.: -40°C to +85°C		1 x CAN-Bus Interface ²⁾ (uses 2 of 3 I/Os)	
Acquisition / Sensitivity:		Cellular ³⁾ : -40°C to +85°C		1 x 2FF mini-SIM Card Holder	
Cold Start:	29 s 30 s	Battery ⁴⁾ Discharging temp.: -20°C to +60°C		1 x USB 2.0 interface	
Tracking:	-161 dBm -158 dBm	Charging temp.: 0°C to +45°C		Sensor / Measurement Range	
Sensitivity:	-148 dBm -145 dBm	Physical Characteristics		3-axis Acceleration/Temperature	
GPS Operational limits:		Dimensions (LxWxH): 105 mm x 83 mm x 28 mm		- 3DG: ± 8g (programmable)	
Velocity:	500 m/s (972 knots)	Security Features on the FOX4		- Temperature: -50 to +120°C (programmable)	
Altitude:	50.000 m	Secure Boot		Processor Core	
Update rate:	1 Hz	ATEC608 secure element		RTC	
GSM / GNSS Antennas				8 MB Flash (History / Firmware / Configuration)	
Internal and external with automatic/manual switch ²⁾					
Wi-Fi 2.4, BLE 5.2 on the FOX4					

1) Optional / Accessory. 2) Activation with PFAL-Command. 3) The cellular engine is fully functional (-20°C to + 55°C meets the 3GPP specifications). 4) Applicable with a backup battery. Storage and using conditions of the device with battery option are limited to the battery temperature range.

- 3000 programmable Geofences
- 2000 programmable Waypoints
- 250 programmable Alarms
- ECO-Drive-GPS functions
- Customizable firmware configuration
- Passive/active RFID-based applications
- NFC-based applications
- Internal GSM/GNSS antennas & connectors for optional external antennas¹⁾
- Hardware expandable via IOBOX-MINI¹⁾, IOBOX-CAN¹⁾
- PROMOTION KIT providing all necessary hardware, software, documentation, SIM Card and trial access to the Perception™ centralized management platform including 8 hour technical training support
- Perception™ device management platform to monitor, diagnose, control and update your devices

- Generator monitoring
- Fuel tank monitoring
- HVAC system monitoring
- Real-time online location tracking
- Fleet management/monitoring
- Car sharing
- Waste management
- Theft prevention
- Public transportation
- Real-time satellite navigation
- Territory management
- Route verification
- Trip management/distance calculations
- Driving behaviour / Eco-Drive monitoring
- Security / Emergency / Insurance services (UBI)
- Toll collection / Pay-As-You-Drive (PAYD)

SKU	REGION	DEAD RECKONING	BATTERY	RS-485	BLE	Wi-Fi	4G LTE	3G/2G FB
F33H002B01	WORLDWIDE		x				M, NB1	x
F33H002B02	WORLDWIDE		x				M, NB1	x
F33H002S	WORLDWIDE						M, NB1	x
F33H007S	JAPAN		x				M, NB2	
F33H502S	WORLDWIDE		x	x			M, NB1	x
F33HGZ2B01	WORLDWIDE		x		4.1		M, NB1	x
F43H102S	EMEA		x		5.2	802.11n	M, NB2	x
F43H207S	JAPAN		x		5.2	802.11n	M, NB2	
F43H20FS	WORLDWIDE		x		5.2	802.11n	M, NB2	
F43H502S	EMEA		x	x	5.2	802.11n	M, NB2	x
F43H507S	JAPAN		x	x	5.2	802.11n	M, NB2	
F43H50FS	WORLDWIDE		x	x	5.2	802.11n	M, NB2	
F43R202S	EMEA	x	x		5.2	802.11n	M, NB2	x
F43R20FS	WORLDWIDE	x	x		5.2	802.11n	M, NB2	
F44H102S	EMEA		x		5.2	802.11n	Cat-1	x
F44H104S	ANZ, LATIN AMERICA		x		5.2	802.11n	Cat-1	x
F44H502S	EMEA		x	x	5.2	802.11n	Cat-1	x
F44H504S	ANZ, LATIN AMERICA		x	x	5.2	802.11n	Cat-1	x

