


## CISCO COMPLIANT 40G QSFP+ QSFP+ 40GBase-X With DMI



The Lantronix TN-QSFP-40G series 40G QSFP+ optical transceivers are designed to install in any QSFP+ port allowing for 40GBase-X interfaces to the network through the QSFP+ connector. The TN-QSFP-40G transceivers are Cisco Compliant\* and are designed for bi-directional serial optical data communication such as 40G Ethernet.

Applications include: 40G Ethernet, 10G Ethernet, and Data Center Aggregation Connection.

TN-QSFP-40G-SR-BD

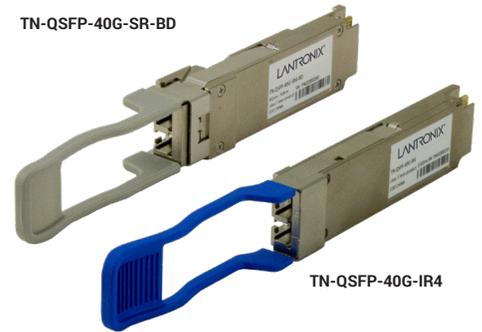

TN-QSFP-40G-IR4

## Key Features

- High capacity: up to 44.4 Gbps per module
- Compliant with SFF 8436 QSFP+ MSA
- Single +3.3 V Power Supply
- RoHS Compliant
- Digital Diagnostic Monitoring
- Low Power Dissipation : SR4< 1.5 Watts, all other modules < 3.5 Watts
- 40GBase-SR4: 4 lanes, up to 11.1Gbps per lane, Standard MPO connector
- 40GBase-LR4 & 40GBase-LR4-3: 4 wavelength CWDM Mux/Demux design, up to 11.1Gbps per wavelength, Duplex LC connector
- 40GBase-SR-BD: two transmit/receive channels, 20Gbps each channel, 850 - 900nm wavelength range, Duplex LC connector
- 40GBase-IR4: 4 wavelength CWDM Mux/Demux design, up to 11.1Gbps per wavelength, Duplex LC connector

## Specifications

Standards	IEEE 802.3ba SFF 8436
Dimensions	Width: 0.71" [18 mm] Depth: 2.83" [72 mm] Height: 0.33" [8.5 mm]
Power	Input 3.3V
Environment	Operating: 0°C to +70°C Storage: -40°C to +85°C
Certifications	IEC 60825-1, FDA CDRH 21-CFR 1040.10 Class 1
Warranty	5 Years

## Compliance Note

\*Lantronix QSFP+ modules fully comply with the Multi-Sourcing Agreement (MSA). This compliance allows our QSFP+ modules to be used in all other MSA compliant QSFP+ platforms. In addition, Lantronix QSFP+ modules are also Compliant with all Cisco QSFP+ based routers and switches, as well as Cisco's IOS software.

Lantronix QSFP+ modules ARE NOT Cisco OEM brand modules.

## Ordering Information

### Duplex

#### TN-QSFP-40G-SR4

QSFP+ 40GBase-SR4, 850nm multimode (MPO)  
[400m/1313ft. on OM4, 300m/985ft. on OM3] with DMI Link Budget: 2.3 dB

#### TN-QSFP-40G-SR-BD

QSFP+ 40GBase-SR-BD, 850nm/900nm multimode (LC)  
[150m/492ft. on OM4, 100m/328ft. on OM3] Link Budget: 3.0 dB

#### TN-QSFP-40G-IR4

QSFP+ 40GBase-IR4, 1271 nm, 1291 nm, 1311 nm, 1331 nm, single mode (LC)  
[2km/1.24mi.] with DMI Link Budget: 6.7 dB

#### TN-QSFP-40G-LR4

QSFP+ 40GBase-LR4, 1271 nm, 1291 nm, 1311 nm, 1331 nm, single mode (LC)  
[10km/6.2mi.] with DMI Link Budget: 7.0 dB

#### TN-QSFP-40G-LR4-3

QSFP+ 40GBase-LR4, 1271 nm, 1291 nm, 1311 nm, 1331 nm single mode (LC)  
[30km/18.7mi.] with DMI Link Budget: 9.0 dB