


Open-Q™ 6490CS SMARC SOM

Based on Qualcomm® Dragonwing™ QCS6490 System-on-Chip

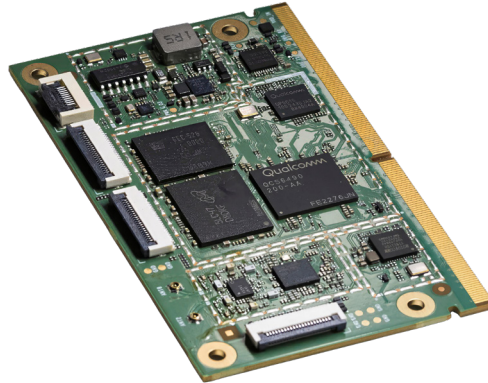

Optimized Processor for Compute Intensive Cameras

The Open-Q™ 6490CS SMARC SOM is a power-efficient compute module designed for advanced edge AI and embedded applications such as industrial PC, robotics, security cameras and video surveillance, retail self-check-out, and video telematics. It is based on the Qualcomm® Dragonwing™ QCS6490 SoC, delivering strong AI/ML performance with optimized power consumption.

Built on a 6nm technology, the module supports on-device AI processing, edge computing, Wi-Fi 6E connectivity, multiple camera interfaces, and up to 4K video encoding and decoding, making it suitable for vision and multimedia applications.

The pin-compatible Open-Q™ 6490CS SMARC SOM allow customers to scale performance across their product line while reducing development effort and time-to-market.

Lantronix provides TAA and NDAA compliant solutions with 10+ years of product longevity, backed by strict BOM control, quality assurance, and over 20 years of embedded hardware and software development experience.

Key Features

- Qualcomm® Dragonwing™ QCS6490 SoC
- Up to 8GB LPDDR5 RAM + 64GB eMMC
- Support UFS and NVMe storage
- Android™ 13 and Qualcomm Linux
- On-device AI Engine up to 12.5 TOPS
- Dedicated Computer Vision Engine
- Multiple MIPI camera and display ports
- Multiple high speed connectivity options
- SMARC 2.2 form factor

Applications

- Security Camera and Video Surveillance
- Edge AI Gateway
- Industrial PC
- Video telematics
- Retail self-check-out
- Digital signage
- Rugged Handhelds

Engineering Services:

We provide a full solution – our unparalleled engineering expertise and product development skills deliver innovative products that are cost-effective and can jumpstart your Go-to-Market timeline.

Our business model offers turnkey product development services, or we can augment your team in specific areas of development. The choice is yours.

Key development expertise in:

- Camera development and tuning
- Voice control
- AI/ML Application
- Mechanical & RF design
- Thermal & power optimization

IoT product development made easy.



Hardware Specifications:

• Processors	Qualcomm® Dragonwing™ QCS6490 SoC built on 6nm technology: Kryo™ 670 Octa-core CPU: 1 Prime @ 2.7 GHz + 3 Gold @ 2.4 GHz + 4 Silver @ 1.8 GHz Hexagon™ 770 with Hexagon Vector eXTensions (HVX)	
	Adreno™ 643L GPU @ Fmax Spectra™ Spectra™ 570L ISP Adreno™ 633 video processing unit	Adreno™ 1075 display processing unit 6th Gen Qualcomm AI Engine Secure processing unit
• Memory/Storage	Up to 8GB LPDDR5 and 64GB eMMC configuration (other configurations available upon request) Supports external UFS and NVMe storages	
• Wireless	Supports up to Wi-Fi 6E, 2x2 MU-MIMO + Bluetooth 5.2	
• Display Interfaces	1x 4-lane MIPI DSI D-PHY 1.2, up to FHD+ touchscreen support Support for USB3.1 Type-C with DisplayPort v1.4 and USB 2.0 Option to support eDP or the LVDS above	
• Camera Interfaces	5x 4-lane MIPI CSI D-PHY 1.2	Spectra 570L ISP supporting 36 MP + 22 MP at 30 fps or three 22 MP at 30fps ZSL. 3x IFE, 2x IFE-lite, 5 concurrent MIPI CSI configurable in 4 + 4 + 4 + 4 + 4 configuration.
• Video Performance	Decode	Video decode up to 4K60. Native decode for H.265/H.265/VP9
	Encode	Video encode up to 4K30. Native encode for H.265/H.265; Support for HDR10 and HDR10+ playback
	Dec & Enc	Concurrent 1080p60 Decode and 1080p60 Encode or 4K30 Decode and 4K30 Encode
• Audio	Support interfaces to WCD938x/WCD937x high fidelity audio codec and WSA883x speaker amp on carrier board. Hexagon™ audio DSP V66M	
• High Speed Connectivity	1x PCIe Gen3 2-lane; 1x PCIe Gen3 1-lane for connectivity 1x USB 3.1 with support for Type-C + DisplayPort v1.4 with USB SS data concurrency 4x USB 2.0	
• I/O Interfaces	4-bit SD 3.0, UART, I2C, I3C, SPI, configurable GPIOs, sensor I/O to dedicated Hexagon™ sensor DSP	
• Power/Battery	Power management on SOM	
• Operating Environment	Input voltage: 5V nominal Operating Temperature: -20°C to +85°C	
• Form Factor	SMARC 2.2 (82 x 55mm)	

Software:

• OS Support	Android™ 13 and Qualcomm Linux
---------------------	--------------------------------

* QCS6490 Chipset Performance, see SOM/SIP Release Notes for details on tested configurations and platforms.



Purchasing Information:

SKU	Description
QC6490-3WN-BL	4GB LPDDR5 / 64GB eMMC with Wi-Fi/BT
QC6490-3WN-DL	8GB LPDDR5 / 64GB eMMC with Wi-Fi/BT
LOQ-615IQ-EVK	Open-Q™ 615IQ devkit bundle with 8GB/64GB SOM and accessories

Alternate SOM configurations available by special order (minimum order quantities apply)
- e.g. different memory size, etc. Contact sales to discuss your specific needs today.

Certifications



© 2026 Lantronix, Inc. All rights reserved. Lantronix is a registered trademark of Lantronix, Inc. in the U.S. and other countries. Open-Q is a trademark of Lantronix, Inc. Qualcomm and Qualcomm Dragonwing are trademarks or registered trademarks of Qualcomm Incorporated. Qualcomm QCS6490, Qualcomm Adreno, Qualcomm Hexagon, Qualcomm Kryo, Qualcomm Spectra and Qualcomm AI Engine are products of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm, Adreno, Hexagon, Kryo and Spectra are trademarks of Qualcomm Incorporated, registered in the United States and other countries. All other trademarks are the property of their respective owners. Specifications subject to change without notice. Not all features listed may be supported in software. MPB-00338 Rev A

Learn more at lantronix.com/open-q-6490-smarc