


Open-X™ 8M SOM (System on Module)

Based on the NXP® i.MX 8M™ SoC

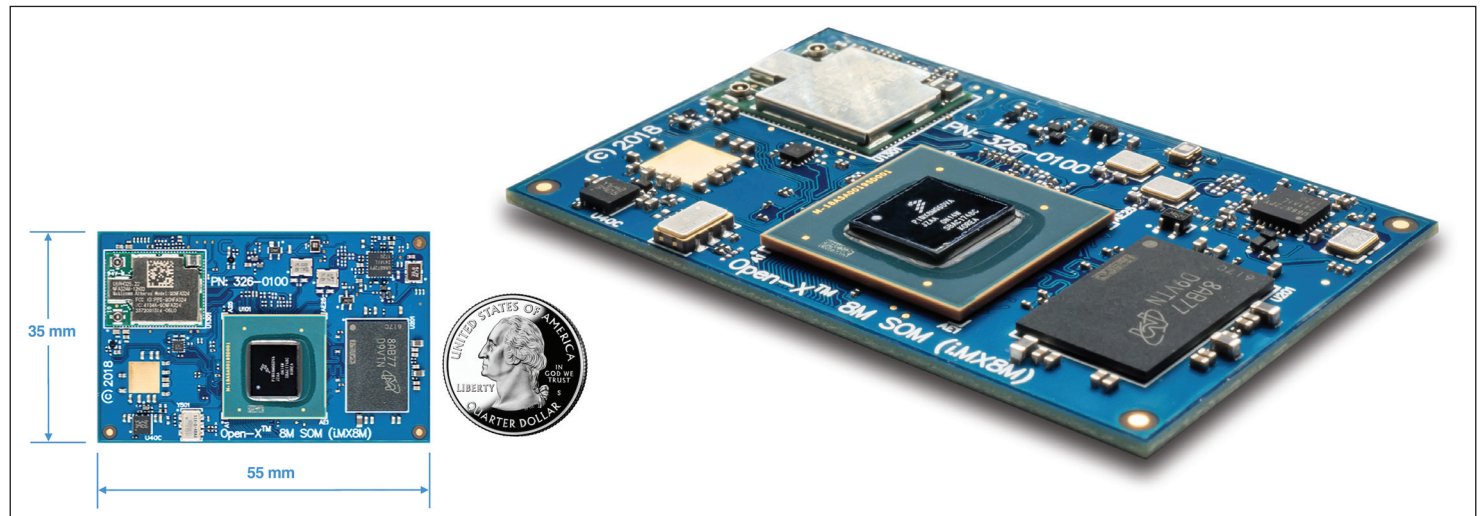

Lantronix's Open-X™ 8M SOM is an ultra-compact (55mm x 35mm) production-ready SOM ideal for powering anything from consumer home video/audio to industrial building automation products. The feature-rich SOM, with industry-leading video/audio features and high speed Wi-Fi, is ideal for streaming devices, voice control applications, and human-machine interface solutions.

It offers high quality video playback with full 4K UHD and HDR along with the highest level of pro-audio fidelity. The wide range of interfaces, including HDMI 2.0a, two USB 3.0, one PCIe, Gigabit Ethernet, and pre-certified dual-band 2x2 MU-MIMO WLAN make the SOM suitable for a wide range of embedded and IoT products.

Key Features

- NXP® i.MX 8M™ SoC
- 3GB LPDDR4 and 16GB eMMC Flash
- Powerful Video Processing
- Two high-def display outputs
- FCC/IC Pre-certified Wi-Fi/BT Module
- Android™ 8, Linux®

Applications

- Video/audio streaming devices
- Human-machine interface products
- Industrial building automation
- Consumer home audio/video products
- Voice control applications

Engineering Services:

We provide a full solution – our unparalleled engineering expertise and product development skills deliver innovative products that are cost-effective and can jumpstart your Go-to-Market timeline.

Our business model offers turnkey product development services, or we can augment your team in specific areas of development. The choice is yours.

Key development expertise in:

- Camera development and tuning
- Voice control
- Machine learning
- Mechanical & RF design
- Thermal & power optimization

IoT Product Development made easy



Lantronix Open-X™ 8M SOM

Hardware Specifications:

Open-X™ 8M SOM	
• Processor	Quad-core ARM Cortex-A53 MPCore platform: Quad symmetric Cortex-A53 processors: 32 KB L1 Instruction Cache, 32 KB L1 Data Cache Support of 64-bit ARMv8-A architecture: 1 MB unified L2 cache, Frequency of 1.5 GHz ARM Cortex-M4 core — 16 KB L1 Instruction Cache, 16 KB L1 Data Cache, 256 KB tightly coupled memory (TCM)
• Memory/Storage	3GB LPDDR4 RAM, 16GB eMMC Flash
• Wireless	WLAN 802.11a/b/g/n/ac 2.4/5.0 GHz 2x2 MU-MIMO + Bluetooth 4.2 Pre-certified module (QCA6174A-1)
• Display Interfaces	HDMI 2.0a supporting resolution up to 4096 x 2160 at 60 Hz 4-lane MIPI DSI interface supporting display resolution up to 1920x1080 at 60 Hz
• Camera Interface	2x 4-lane MIPI CSI2 camera inputs
• Graphic Processing Unit	4 shader, 267 million triangles/sec, 1.6 Giga pixel/sec 32 GFLOPs 32-bit or 64 GFLOPs 16-bit Supports OpenGL ES 1.1, 2.0, 3.0, 3.1, Open CL 1.2, and Vulkan
• Video Processing Unit	4Kp60 HEVC/H.265 main, and main 10 decoder 4Kp60 VP9 decoder 4Kp30 AVC/H.264 decoder 1080p60 MPEG-2, MPEG-4p2, VC-1, VP8, RV9, AVS, MJPEG, H.263 decoder
• Audio Interfaces	S/PDIF input and output 1x 16 channel bi-directional SAI digital audio interface supporting I2S, AC97, TDM, DSP 1x 8 channel receive SAI digital audio interface (I2S, AC97, TDM, DSP) 2x 2 channel bi-directional SAI digital audio interface (I2S, AC97, TDM, DSP)
• Power Management	Power management IC: NXP PF4210
• I/O	2x USB 3.0, 1x PCIe Gen2, Gigabit Ethernet, 4-bit SDIO, 2x debug UART, JTAG
• Operating Environment	Input supply voltage: 3.3V nominal Operating Temperature: 0°C to +70°C
• Form Factor	3x 100 pin board to board connectors 50mm x 35mm

Software:

• OS Support	Android™ 8, Linux® *Note that all hardware features may not be supported by all SW versions — see latest SW release notes for details.
---------------------	---

Purchasing Information:

• Open-X™ 8M SOM	PN: QC-DB-Q00004
-------------------------	------------------

Alternate SOM configurations available by special order (minimum order quantities apply) - e.g. different memory size, etc. Contact sales to discuss your specific needs today.

Contact Information:

Americas

800.422.7055
americas_sales@lantronix.com
www.lantronix.com
NASDAQ: LTRX

Europe

+31 (0) 76.52.3.6.74 4
eu_sales@lantronix.com

Asia/Pacific/Japan

+852 3428.2338
asiapacific_sales@lantronix.com
China: +86.21.6237.8868
India: +91 994-551-2488
Indonesia: +91 994-551-2488
Japan: +81.8.50.1354.6201

Certifications



© 2021 Lantronix, Inc. All rights reserved. Lantronix is a registered trademark of Lantronix, Inc. in the U.S. and other countries. Open-X is a trademark of Lantronix, Inc. NXP is a registered trademark of NXP Semiconductors. i.MX 8M is a trademark of NXP Semiconductors. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries. Cortex is a trademark of ARM Holding plc. Used with permission. All other trademarks are the property of their respective owners. Specifications subject to change without notice. Not all features listed may be supported in software. Open-X 8M SOM MBR-00023 Rev A.

LANTRONIX®