

SI-IES-111D-LRT *and* SI-IES-121D-LRT

Unmanaged Hardened PoE+ Injector/Converter



User Guide

PN 33585 Rev. K

Contents

1. Overview	5
Introduction.....	5
Ordering Information	5
Features.....	5
Packing List	6
Safety Precaution	6
Product Views.....	6
2. Hardware Description	7
Front Panel	7
Top View.....	7
Grounding.....	8
DIP Switch.....	8
Ports	9
Cabling	10
Wiring the Power Inputs	13
LED Indicators.....	14
3. Mounting	15
DIN-Rail Mounting.....	15
Wall Mounting (Optional)	16
4. Troubleshooting	18
Specifications.....	19
Power Supply Specifications.....	21
25131 Features and Specifications	21
25130 Features and Specifications	22
Service	24
Warranty	24
Declaration of Conformity.....	26

FCC Warning

This Equipment has been tested and found to comply with the limits for a Class-A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy. It may cause harmful interference to radio communications if the equipment is not installed and used in accordance with the instructions. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CE Mark Warning

This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Trademarks

All trademarks and registered trademarks are the property of their respective owners.

Copyright Notice/Restrictions

Copyright© 2013-2021 Transition Networks. All rights reserved. No part of this work may be reproduced or used in any form or by any means (graphic, electronic or mechanical) without written permission from Transition Networks. Printed in the U.S.A.

SI-IES-111D-LRT and SI-IES-121D-LRT Unmanaged Hardened PoE+ Injector/Converter
User Guide PN 33585 Rev. K

Contact Information

Transition Networks

10900 Red Circle Drive

Minnetonka, MN 55343 USA

Tel: 952- 941-7600 or 1-800-526-9267

Fax: 952-941-2322

Revision History

Rev.	Date	Description
D	1/26/16	Note to adjust power supply to 50VDC ~ 53VDC for full PoE+ power.
E	5/11/16	Update default speed DIP switch setting and grounding information.
F	1/6/17	Update power supply, certification, and contact information.
G	2/23/17	Add DoC (Declaration of Conformity).
H	5/4/17	Add MTBF and clarify specs.
I	8/10/17	Add Max Frame Size.
J	7/13/20	Update features, specifications, certifications, and DoC.
K	9/20/21	Update DoC, DIN-rail bracket, and Wall Mount bracket.

1. Overview

Introduction

The SI-IES-111D-LRT is a 2-port unmanaged hardened PoE+ injector that adds up to 30 Watts of power from its PoE+ Port onto a network segment. The gigabit speed SFP slot provides the ultimate flexibility by allowing fiber SFP uplink ports with varying communication distances.

The SI-IES-121D-LRT is a 3-port unmanaged hardened PoE+ injector / converter that adds up to 30 Watts of power from its (2) PoE+ ports onto 2 network segments. The gigabit speed SFP slot provides the ultimate flexibility by allowing fiber SFP uplink ports with varying communication distances.

Ordering Information

SI-IES-111D-LRT	(1) 100/1000Base-X SFP slot + (1) 10/100/1000Base-T PoE+ port
SI-IES-121D-LRT	(1) 100/1000Base-X SFP port + (2) 10/100/1000Base-T PoE+ ports
Optional Accessories (sold separately)	
SFP Modules	See Transition Networks relevant SFP Modules page
25130	Industrial Power Supply for SI-IES-111D-LRT. Input: 88-264VAC, 120-370 VDC. Output: 48-55VDC, 0.83A, 39.8 Watts
25131	Industrial Power Supply for SI-IES-121D-LRT. Input: 85-264VAC, 120-370 VDC. Output: 48-55VDC, 1.6A, 76.88 Watts
OCA-P181610	18x16x10" Polycarbonate Enclosure

Features

- IEEE 802.3at PoE+ to supply 30 Watts on 10/100/1000Base-T port (SI-IES-111D-LRT)
- IEEE 802.3at PoE+ to supply 30 Watts per port (SI-IES-121D-LRT)
- Supports IEEE 802.3af
- Supports dual speed for SFP slot
- Compact, space saving size
- IP31 housing protection
- Link Pass Through
- Extended operating temperature (-40°C to +75°C)
- DIN Rail mount / optional wall mount brackets included
- Full/half-duplex flow control
- Auto-MDI/MDIX
- Auto-Negotiation
- 10K byte jumbo frames

Packing List

- One Hardened Injector/ Converter with IEEE 802.3af/IEEE 802.3at PSE
- One Documentation Postcard
- One DIN-rail Clip
- Two Wall Mounting Brackets and Screws (Optional)

Safety Precaution

If DC voltage is supplied by an external power supply; you must use an isolated power supply.

Product Views



2. Hardware Description

This section provides product views, grounding, wiring, LED, DIP switch, and cabling information.

Front Panel


The SI-IES-111D-LRT and SI-IES-121D-LRT front panels are shown below.



Hardened PoE+ Devices Front Panels

Top View

Consistent with the IP31 rating, the terminal block connector for the DC power input is located on the bottom of the device.

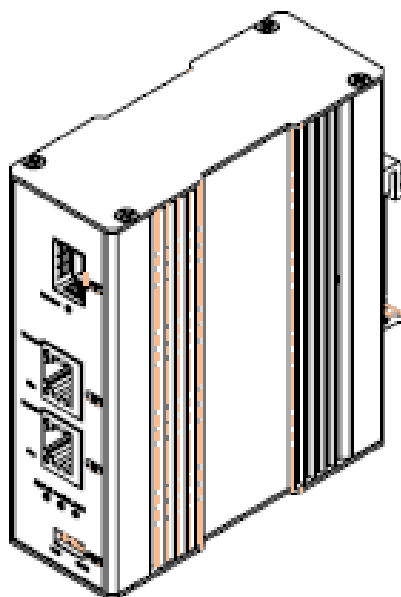

Top Panel of the Hardened PoE+ Devices

Grounding

After the Injector is mounted and connected, the back panel grounding screw can be used for grounding. Grounding and wire routing help limit the effects of noise due to electromagnetic interference (EMI).

Note: Run the ground connection from the ground screw to the grounding surface before connecting devices.

Caution: Avoid Improper Grounding

Required:


Isolated DC Supply

Connect chassis to earth ground

Do not connect earth ground to:

Negative input terminal

Positive input terminal

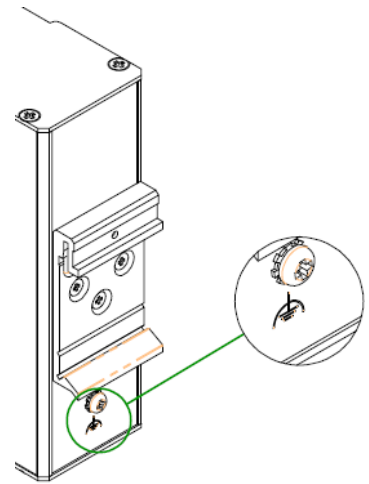

DIP Switch

The front panel DIP Switch is used to configure the SFP operating speed. The default position is Mode 2, **1000M**.

Table 2.2: DIP Switch Definition

Status	Description
Mode 1	100M
Mode 2	1000M



The SFPs are hot-swappable. However, you must cycle device power whenever the DIP switch is changed (i.e., whenever changing SFP mode/speed).

Ports

RJ45 ports (Auto MDI/MDIX): The RJ-45 ports are auto-sensing for 10Base-T, 100Base-TX or 1000Base-T device connections. Auto MDI/MDIX means that you can connect to another switch or workstation without changing straight through or crossover cabling. See information below for straight through and crossover cable PIN assignments.

RJ-45 Pin Assignments

Pin Number	Assignment
1	Tx+
2	Tx-
3	Rx+
6	Rx-

Note: The “+” and “-” signs represent the polarity of the wires that make up each wire pair.

All ports on this Hardened PoE injector support automatic MDI/MDI-X operation, so you can use straight-through cables (see below) for all network connections to PCs, servers, or to other switches or hubs. In straight-through cables, pins 1, 2, 3, and 6, at one end of the cable, are connected straight through to pins 1, 2, 3 and 6 at the other end of the cable. The table below shows the 10BASE-T/ 100BASE-TX /1000Base-T MDI and MDI-X port pin outs.

Pin MDI-X	Signal Name	MDI Signal Name
1	Receive Data plus (RD+)	Transmit Data plus (TD+)
2	Receive Data minus (RD-)	Transmit Data minus (TD-)
3	Transmit Data plus (TD+)	Receive Data plus (RD+)
6	Transmit Data minus (TD-)	Receive Data minus (RD-)

Signals for 1000Base-T

Pin	Signal name	Signal definition
1	TRD+(0)	Transmit and receive data 0 (positive lead)
2	TRD-(0)	Transmit and receive data 0 (negative lead)
3	TRD+(1)	Transmit and receive data 1 (positive lead)
4	TRD+(2)	Transmit and receive data 2 (positive lead)
5	TRD-(2)	Transmit and receive data 2 (negative lead)
6	TRD-(1)	Transmit and receive data 1 (negative lead)
7	TRD+(3)	Transmit and receive data 3 (positive lead)
8	TRD-(3)	Transmit and receive data 3 (negative lead)

Cabling

A twisted-pair segment can use unshielded twisted pair (UTP) or shielded twisted pair (STP) cabling. The cable between the powered device and the injector must be less than 100 meters (328 ft.) long and comply with the IEEE 802.3ab 1000Base-T standard for Category 5e or above.

The Fiber segment using a single-mode connector type must use 9/125 μ m single-mode fiber cable. You can connect two devices at a distance of 10 km. Fiber segment using multi-mode connector type must use 50/125 or 62.5/125 μ m multi-mode fiber cable. You can connect two devices at a distance of 550m.

The small form-factor pluggable (SFP) is a compact optical transceiver used in optical communications for both telecommunication and data communication applications.

See the Transition Networks [SFP web page](#) for more small form factor pluggable (SFP) transceivers information.

Refer to the SFP manual for important safety information.

To connect the SFP transceiver and LC cable, follow the steps shown below:

1. Insert the transceiver into the SFP module. Notice that the triangle mark is the bottom of the module.

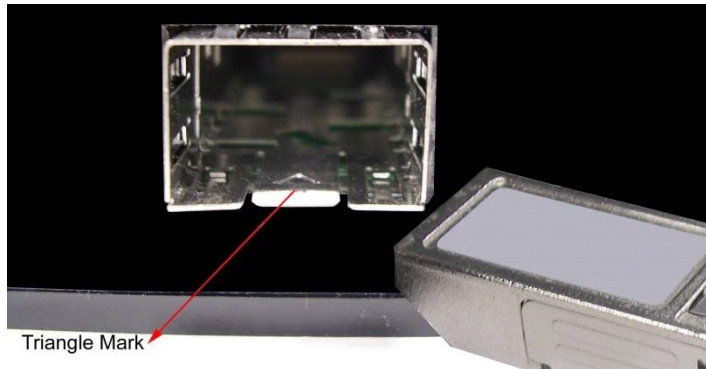


Figure 2.8: Transceiver to the SFP module

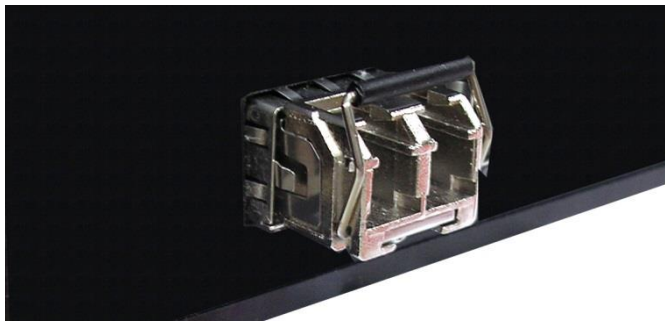


Figure 2.9: Transceiver Inserted

2. Insert the LC connector of the fiber cable into the SFP transceiver.

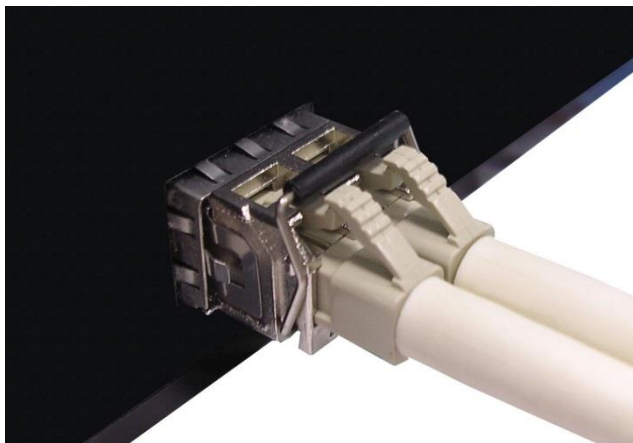


Figure 2.10: LC connector to the SFP transceiver

To **remove** the LC connector from the SFP transceiver, follow the steps below:

1. Press the upper side of the LC connector from the transceiver and pull it out to release.

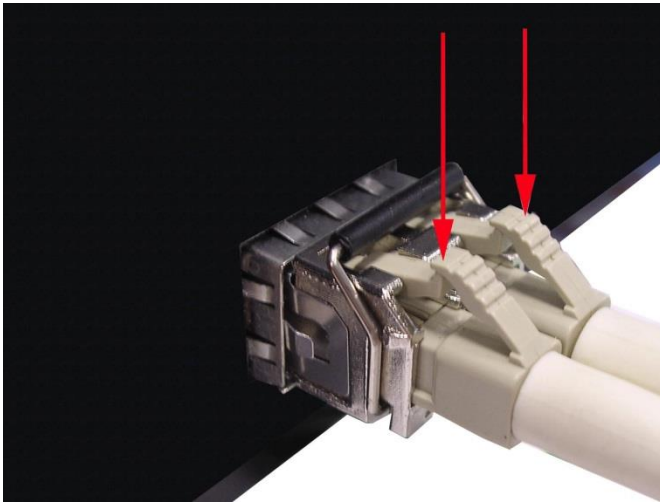


Figure 2.11: Remove LC connector

2. Push down on the metal loop and pull the transceiver using the metal loop.

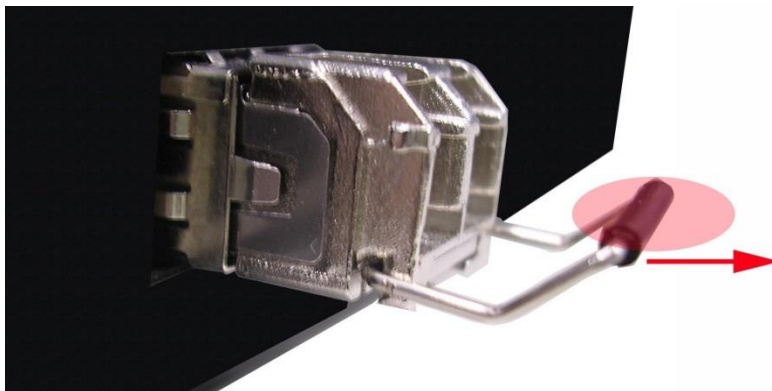


Figure 2.12: Pull out from the SFP module

Wiring the Power Inputs

Follow the steps below to insert the power wire.



1. Locate the labeling on the device indicating the location of V+ and V- power input connections on the device.




2. Insert the positive and negative wires into the V+ and V- contacts on the terminal block connector.
3. Tighten the wire-clamp screws on the terminal block, highlighted in red above, to secure the wire connections.

Note: The wire gauge for the terminal block should be 12~ 24 AWG.

Note: Adjust the power supply as required. These devices accept 48~57VDC; higher voltage (50~57VDC) may be required for some high powered PD loads.

LED Indicators

The front panel LEDs display power status and network status.

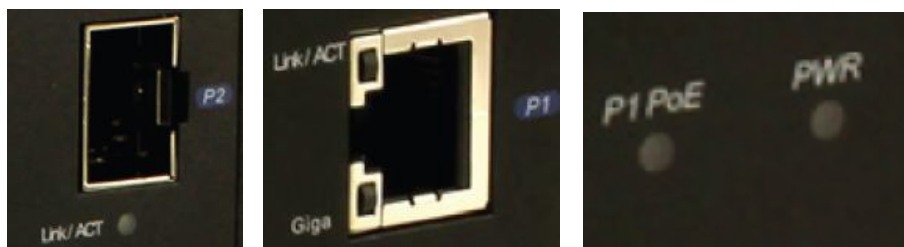

Each LED state and color has its own specific meaning as defined in the table below.


Table 2.1: LED Definition

LED Indicator	Label	Description	
System Power	PWR	Off	Power off
		Solid Green	Power on
PoE Power	PoE	Off	No PoE power output
		Solid Green	PoE power output OK
RJ-45	Giga	Solid Amber	Link to 1000M bps network
		Off	Not connected to network or not working at speed of 1000M
	Link/ACT	Solid Green	Connected to network
		Blinking Green	Networking is active
		Off	Not connected to network
SFP	Link/ACT	Off	No SFP connection detected
		Solid Green	When there is a secure SFP connection
		Blinking Green	When there is transmission or reception of data occurring at speed of 100/1000Mbps

3. Mounting

DIN-Rail Mounting


The DIN-rail clip is screwed onto the SI-IES-1x1D-LRT when built at the factory. If the DIN-rail clip is not installed, see the figure below to install the DIN-rail clip onto the switch.

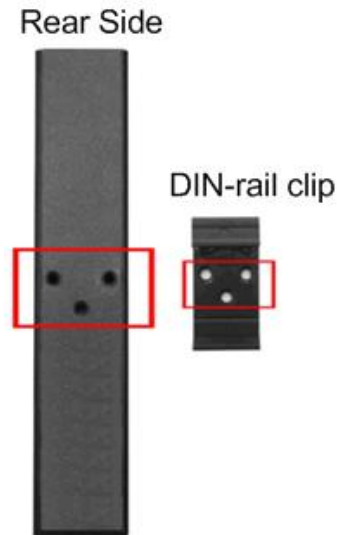

1. Use the screws to install the DIN-rail clip on the SI-IES-1x1D-LRT.
2. To remove the DIN-rail, uninstall by removing the screws.


Follow the steps below to hang the Hardened PoE injector on the DIN-rail track.

1. Insert the top of DIN-rail clip over the top edge of the DIN-rail track.

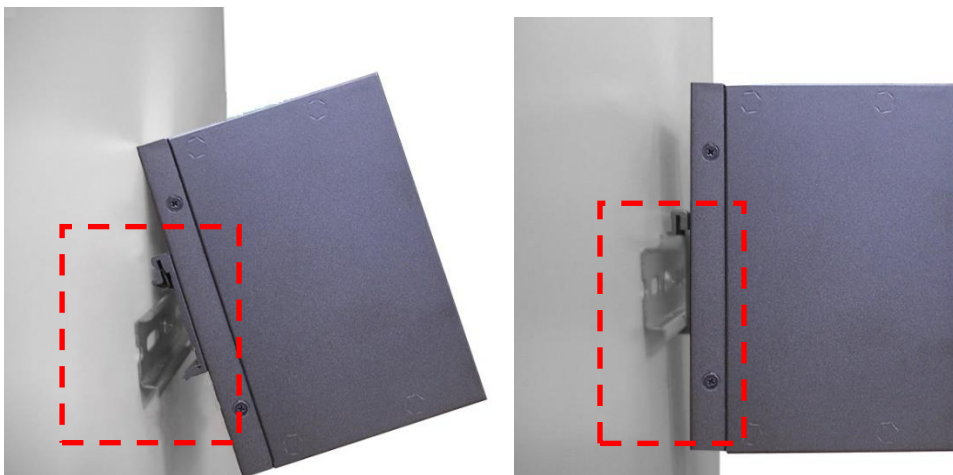

2. Lightly push down on the SI-IES-1x1D-LRT until the bottom of DIN-rail clip snaps onto the bottom edge of the DIN-rail track.
3. Check that the SI-IES-1x1D-LRT is securely mounted on the track.
4. To remove the SI-IES-1x1D-LRT from the track, reverse the steps above.


Wall Mounting (Optional)

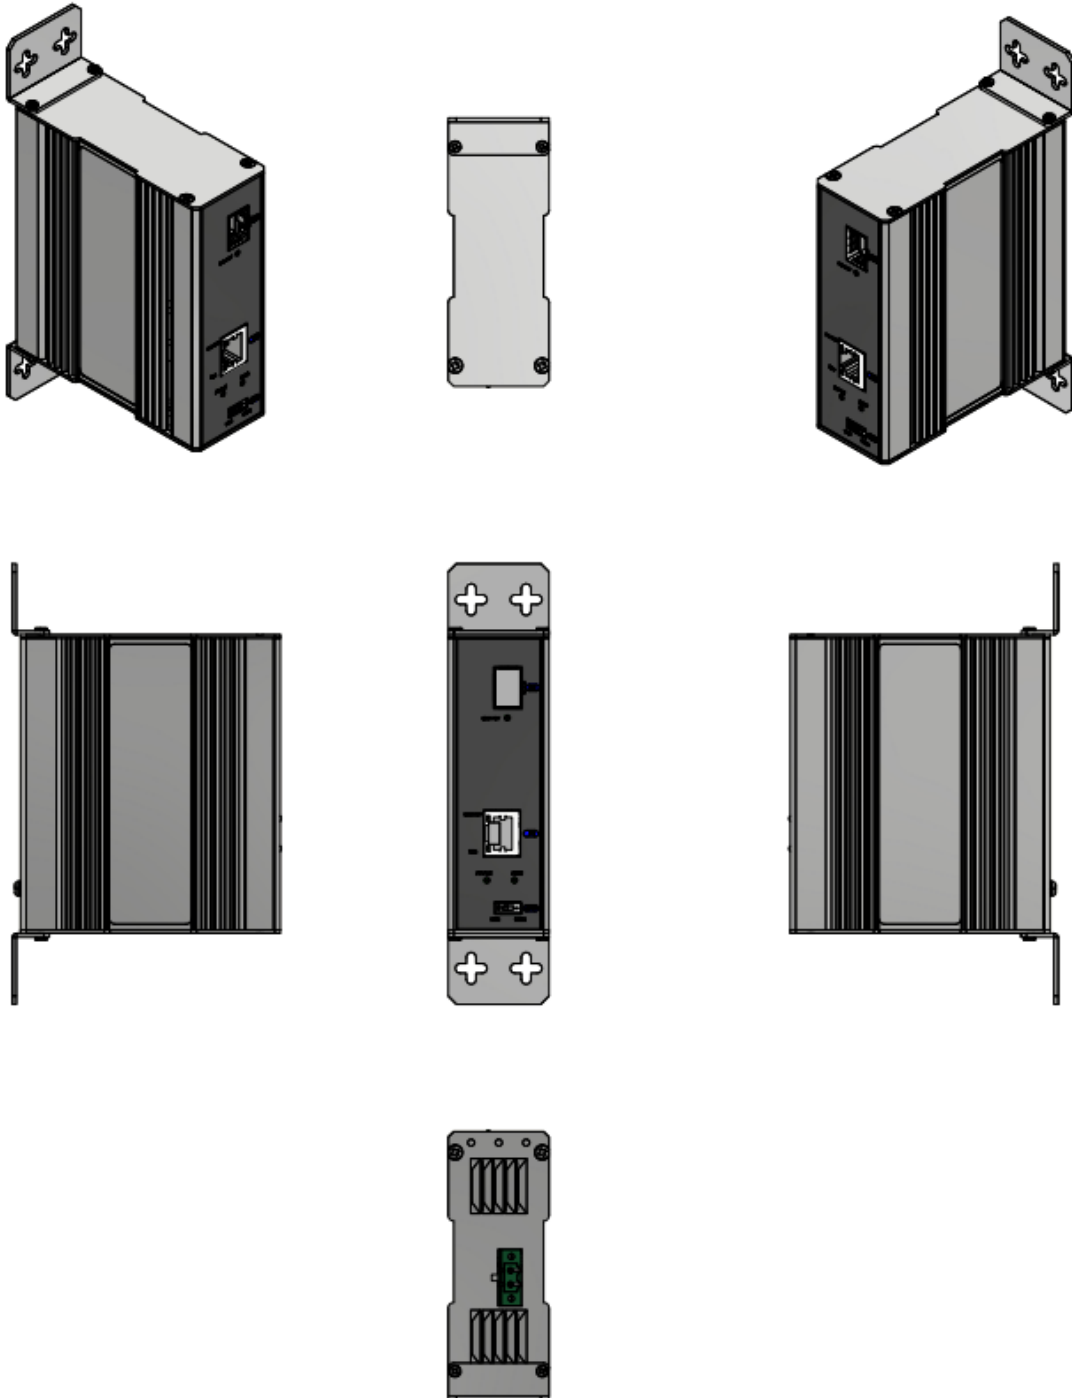

Follow the steps below to mount the SI-IES-1x1D-LRT with the wall mount brackets.

1. Remove the DIN-rail clip from the SI-IES-1x1D-LRT by removing the three mounting screws as shown below.
2. Place the wall mount brackets on the rear panel of the PoE Injector/Converter.
3. Use the existing screws to install the wall mount plates on the PoE Injector/Converter.

4. Use the hook holes at the corners of the wall mount brackets to hang the PoE Injector/Converter on the wall.
5. To remove the wall mount brackets, reverse the steps above.

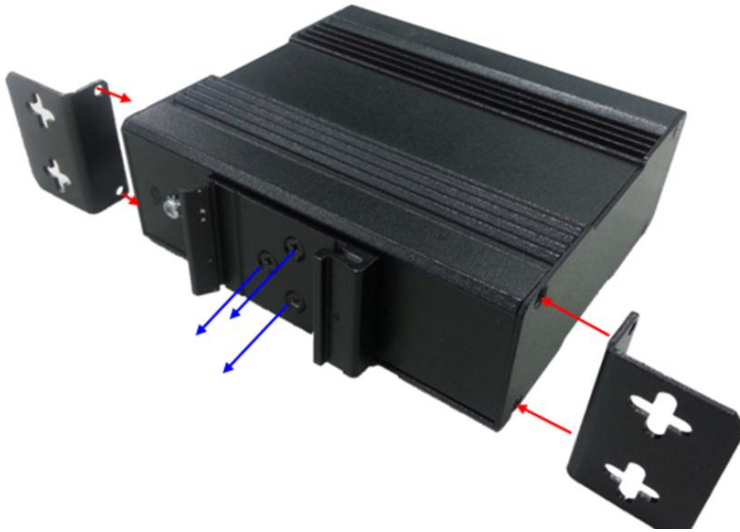

4. Troubleshooting

- Select the proper UTP cable to construct your network. Use unshielded twisted-pair (UTP) or shielded twisted-pair (STP) cable for RJ45 connections: 100Ω Category 3, 4 or 5 cable for 10Mbps connections, 100Ω Category 5 cable for 100Mbps, or 100Ω Category 5e/above cable for 1000Mbps connections. Also be sure that the length of any twisted-pair connection does not exceed 100 meters (328 feet).
- **Diagnosing LED Indicators:** To assist in identifying problems, the SI-IES-1x1D-LRT can be monitored through the panel LED indicators that provide the device's current status. These LEDs can help diagnose common problems the user may encounter during installation.
- Verify that you are using the right power cord and power adapter.
- If the SI-IES-1x1D-LRT is not producing full PoE+ output, ensure the power supply is adjusted to provide the required input power. The converters accept 48~57VDC; higher voltage (53~57VDC) required for some high powered PD loads. See [Wiring the Power Inputs](#) on page 13.
- If the power LED does not light when the power cord is plugged in, you may have a problem with the power cord or power source. Check for loose power connections, power losses and power at the power outlet. If you still cannot resolve the problem, contact Transition Networks technical support for assistance.
- If the Injector/Converter LEDs are normal, the connected cables are correct, and the device fails to transmit data, check your system's Ethernet devices' configuration or status.
- Check the DIP switch setting. The devices ship defaulted to 1000Base-T on the DIP switch. When changing the speed from 1000Base-T to 100Base-T, the unit must be power cycled after installing the 100Base-T SFP and setting the DIP switch to 100 Mbps. Then it will link at 100Base-T. See [DIP Switch](#) on page 8.

Specifications

SI-IES-1x1D-LRT technical specifications are listed below. Note that specifications are subject to change without further notification.

Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab, IEEE 802.3at, IEEE 802.3z, IEEE 802.3af Compliant with 802.3at in Environment A when using an isolated power supply
Max Frame Size	10K byte jumbo frames
Connectors	1 x SFP slot 1 x RJ45 (SI-IES-111D-LRT) 2 x RJ45 (SI-IES-121D-LRT) 2-pin removable terminal block
Status LEDs	Copper port: Link/ACT Copper port: Gigabit transmission SFP (Fiber) port: Link/ACT PoE1: Power PoE2: Power (SI-IES-121D-LRT) PWR: Input power
Dimensions	Width: 1.44" [36.7 mm] Depth: 3.72" [94.5 mm] Height: 4.26" [108.4 mm]
Power Consumption	3.53 Watts (No PoE) 32.725 Watts (1 port PoE) 63.5 Watts (2 ports PoE)
Power Input	48-57VDC Higher Voltage (50-53VDC) may be required for some high powered PD loads
Ingress Protection	IP31
Environment	Operating: -40°C to +75°C Storage: -40°C to +85°C Humidity: 10% to 95% (non-condensing) Altitude: 0 – 10,000 ft.
Weight	1.3 lbs. [0.59 kg]
Mounting	DIN-rail, Wall-mount (optional)

Certifications	<p>Safety: UL508</p> <p>Class 1, Division 2, Groups A,B,C and D Hazardous Locations</p> <p>CE, FCC Class A</p> <p>EN55011</p> <p>EN55022/EN61000-6-4 (EMC)</p> <p>EN55024/EN61000-6-2 (Immunity)</p> <p>IEC/EN61000-4-2 (ESD)</p> <p>IEC/EN61000-4-3 (RS)</p> <p>IEC/EN61000-4-4 (EFT)</p> <p>IEC/EN61000-4-5 (Surge)</p> <p>IEC/EN61000-4-6 (CS)</p> <p>IEC/EN61000-4-8 (Magnetic Field)</p> <p>IEC60068-2-27 (Shock)</p> <p>IEC60068-2-32 (Free Fall)</p> <p>IEC60068-2-6 (Vibration)</p>
MTBF	<p>SI-IES-111D-LRT:</p> <p>743,594 Hours Bellcore Ground Benign, Controlled; Temp 30oC.</p> <p>653,092 Hours Bellcore Ground Fixed, Uncontrolled; Temp 30oC.</p> <p>SI-IES-121D-LRT:</p> <p>717,339 Hours Bellcore Ground Benign, Controlled; Temp 30oC.</p> <p>613,639 Hours Bellcore Ground Fixed, Uncontrolled; Temp 30oC.</p>

Power Supply Specifications

Power supply option TN PN 25131 and 25130 specs are provided below (subject to change). Options for SI-IES-111D-LRT include either 25130 or 25131. The option for the SI-IES-121D-LRT is 25131.

25131 Features and Specifications

The 25131 power supply is a 48VDC, 75 Watts, Industrial DIN-rail Mounted Power Supply. The 25131 power supply is for use with SI-IES-121D-LRT.

Features

- Auto-Negotiation
- Variable AC input range
- Overload, Over Voltage, and Over Temperature Protection
- Convection air cooling
- UL 508 approved
- RoHS compliant
- MTBF 481.9Khrs

Specifications

Output:

Output Voltage: 48VDC
 Current Rating: 1.6A
 Power Rating: 76.8 Watts
 Ripple & Noise Max: 120mVp-p
 Voltage Range: 48~55VDC
 Voltage Tolerance: $\pm 1.0\%$
 Line Regulation: $\pm 0.5\%$
 Load Regulation: $\pm 1.0\%$
 Setup, Rise Time: 3000ms, 60ms
 Hold Up Time: 20ms/115VAC

Input

Voltage Range Switch Selectable: 88~264VAC,
 124~370VDC
 Frequency Range: 47~63Hz
 Efficiency: 90%
 AC Current (Typical): 1.4A@115VAC, .85A@230VAC
 Inrush Current (Cold): 30A@115VAC, 50A@230VAC
 Leakage Current: <1mA@240VAC

Protection

Overload: 110~150%
 Overvoltage: 56~65.8V

Environment

Operating: -30°C to +70°C
 Storage: -40°C to +85°C
 Humidity: 20% to 95% (non-condensing)

Weight: 1.12 lbs. [0.51 kg]

Compliance

Safety: UL508, TUV EN60950-1, IEC60068-2-6 (Vibration); EN55022, CISPR22, EN61204-3 Class B, EN61000-3-2, EN61000-3-3, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11, EN55024, EN61000-6-2, EN50082-2, EN61204-3 A, IEC60068-2-6 (Vibration)

Dimensions: Width: 1.26" [32 mm] x Depth: 4.02" [102 mm] x Height: 4.93" [125.2 mm]

Warranty: Lifetime



25130 Features and Specifications

PS PN 25130 is for use with SI-IES-111D-LRT or SI-IES-121D-LRT. This power supply provides the isolation recommended for Environment A.

Features

- Variable AC input range
- Protected against Overload and Over Voltage
- Convection air cooling
- DIN rail mountable
- UL 508 approved
- Full load burn in test
- RoHS Compliant
- MTBF 301.7Khrs

Specifications

Output:

- Output Voltage: 48VDC
- Current Rating: 0.83A
- Power Rating: 39.8 Watts
- Ripple & Noise Max: 200mVp-p
- Voltage Range: 48~56VDC
- Voltage Tolerance: $\pm 1.0\%$
- Line Regulation: $\pm 1.0\%$
- Load Regulation: $\pm 1.0\%$
- Setup, Rise Time: 500ms, 30ms
- Hold Up Time: 20ms/115VAC

Input:

- Voltage Range Switch Selectable: 88~264VAC,
120~370VDC
- Frequency Range: 47~63Hz
- Efficiency: 88%
- AC Current (Typical): 1.1A@115VAC, 0.7A@230VAC
- Inrush Current (Cold): 30A@115VAC, 60A@230VAC
- Leakage Current: <1mA@240VAC
- Protection Overload: 105~150%
- Overvoltage: 57.6~64.8V



Environment:

- Operating Temp: -20°C to +70°C
- Storage Temp: -40°C to +85°C
- Humidity: 20% to 90% (non-condensing)
- Weight: 0.66 lbs. [0.3 kg]

Compliance:


- Safety: UL508, TUV EN60950-1, NEC Class 2, LPS Compliant, UL60950-1, EN55011, EN55022,
- CISPR22, EN61204-3 Class B,
- EN61000-3-2, EN61000-3-3, EN61000-4-2,
- EN61000-4-3, EN61000-4-4, EN61000-4-5,
- EN61000-4-6, EN61000-4-8, EN61000-4-11,
- EN55024, EN61000-6-2, EN50082-2, EN61204-3 A,
- IEC60068-2-6 (Vibration)

Warranty: Lifetime

25130 Dimensions

Dimensions:

- Width: 1.57" [40 mm]
- Depth: 3.94" [100 mm]
- Height: 3.54" [90 mm]

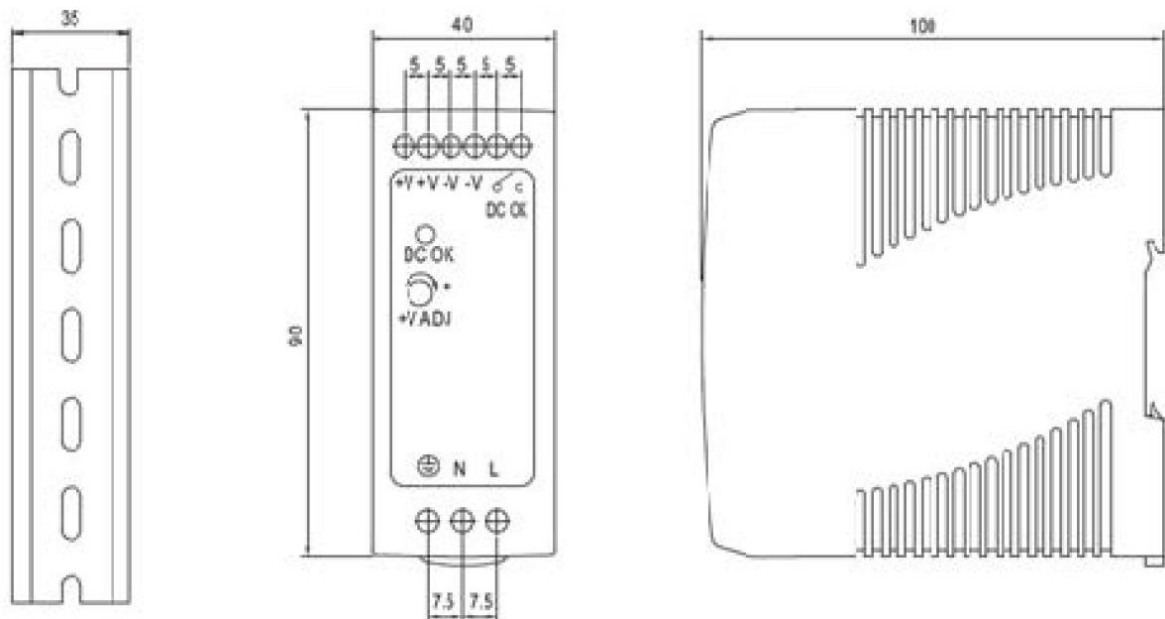

Service

Contact Us

Technical Support: Technical support is available 24-hours a day

US and Canada: 1-800-260-1312

International: 00-1-952-941-7600

Main Office

tel: +1.952.941.7600 | toll free: 1.800.526.9267 | fax: 952.941.2322

sales@transition.com | techsupport@transition.com | customerservice@transition.com

Address

Transition Networks

10900 Red Circle Drive

Minnetonka, MN 55343, U.S.A.

Web: <https://www.transition.com>

Warranty

This warranty is your only remedy. No other warranties, such as fitness for a particular purpose, are expressed or implied. Transition Networks is not liable for any special, indirect, incidental or consequential damages or losses, including loss of data, arising from any cause or theory. Authorized resellers may not extend any different warranty on Transition Networks' behalf.

Limited Lifetime Warranty

Effective for Products Shipped May 1, 1999 and After. Every Transition Networks labeled product purchased after May 1, 1999, and not covered by a fixed-duration warranty will be free from defects in material and workmanship for its lifetime. This warranty covers the original user only and is not transferable. This warranty does not cover damage from accident, acts of God, neglect, contamination, misuse or abnormal conditions of operation or handling, including over-voltage failures caused by use outside of the product's specified rating, or normal wear and tear of mechanical components. Transition Networks will, at its option:

- Repair the defective product to functional specification at no charge
- Replace the product with an equivalent functional product
- Refund a portion of purchase price based on a depreciated value

To return a defective product for warranty coverage, contact Transition Networks' Customer Support for a return authorization number. Send the defective product postage and insurance prepaid to the following address:

Transition Networks, Inc.

10900 Red Circle Drive

Minnetonka, MN 55343 USA

Attn: RETURNS DEPT: CRA/RMA # _____

Failure to properly protect the product during shipping may void this warranty. The return authorization number must be written on the outside of the carton to ensure its acceptance. We cannot accept delivery of any equipment that is sent to us without a CRA or RMA number.

CRA's are valid for 60 days from the date of issuance. An invoice will be generated for payment on any unit(s) not returned within 60 days.

Upon completion of a demo/ evaluation test period, units must be returned or purchased within 30 days. An invoice will be generated for payment on any unit(s) not returned within 30 days after the demo/ evaluation period has expired.

The customer must pay for the non-compliant product(s) return transportation costs to Transition Networks for evaluation of said product(s) for repair or replacement. Transition Networks will pay for the shipping of the repaired or replaced in-warranty product(s) back to the customer (any and all customs charges, tariffs, or/and taxes are the customer's responsibility).

Before making any non-warranty repair, Transition Networks requires a \$200.00 charge plus actual shipping costs to and from the customer. If the repair is greater than \$200.00, an estimate is issued to the customer for authorization of repair. If no authorization is obtained, or the product is deemed not repairable, Transition Networks will retain the \$200.00 service charge and return the product to the customer not repaired. Non-warranted products that are repaired by Transition Networks for a fee will carry a 180-day limited warranty. All warranty claims are subject to the restrictions and conventions set forth by this document.

Transition Networks reserves the right to charge a \$50 fee for all testing and shipping incurred, if after testing, a return is classified as "No Problem Found."

THIS WARRANTY IS YOUR ONLY REMEDY. NO OTHER WARRANTIES, SUCH AS FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSED OR IMPLIED. TRANSITION NETWORKS IS NOT LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES OR LOSSES, INCLUDING LOSS OF DATA, ARISING FROM ANY CAUSE OR THEORY. AUTHORIZED RESELLERS ARE NOT AUTHORIZED TO EXTEND ANY DIFFERENT WARRANTY ON TRANSITION NETWORKS'S BEHALF.

Declaration of Conformity

Declaration of Conformity

Transition Networks, Inc.

Manufacturer's Name

10900 Red Circle Drive, Minnetonka, Minnesota 55343 U.S.A.

Manufacturer's Address

**Declares that the products:
SI-IES-111D-LRT and SI-IES-121D-LRT**

Conforms to the following Product Regulations:

**FCC Part 15 Class A, EN 55032:2012, EN 55024:2010
Directive 2014/30/EU, Directive 2015/863/EU
Low-Voltage Directive 2014/35/EU
2011/65/EU EN 50581:2012
EN 55011: 2009 +A1: 2010 (Group 1, Class A)
EN55022/EN61000-6-4, EN55024/EN61000-6-2, IEC/EN61000-4-2, IEC/EN61000-4-3,
IEC/EN61000-4-4, IEC/EN61000-4-5, IEC/EN61000-4-6, IEC/EN61000-4-8,
IEC60068-2-27, IEC60068-2-32, and IEC60068-2-6**

With the technical construction on file at the above address, this product carries the

CE Mark


I, the undersigned, hereby declare that the equipment specified above conforms to the above Directive(s) and Standards(s).

Minnetonka, Minnesota

Place

July 13, 2020

Date



Signature

Stephen Anderson

Full Name

Vice President of Engineering

Position

28141B



Transition Networks

10900 Red Circle Drive

Minnetonka, MN 55343 USA

Tel: 952- 941-7600 or 1-800-526-9267

Fax: 952-941-2322

Copyright© 2013-2021 Transition Networks. All rights reserved.

SI-IES-111D-LRT and SI-IES-121D-LRT Hardened PoE/PoE+ Injector/Converter User Guide

PN 33585 Rev. K