


# Open-Q™ 6490CS SOM Development Kit

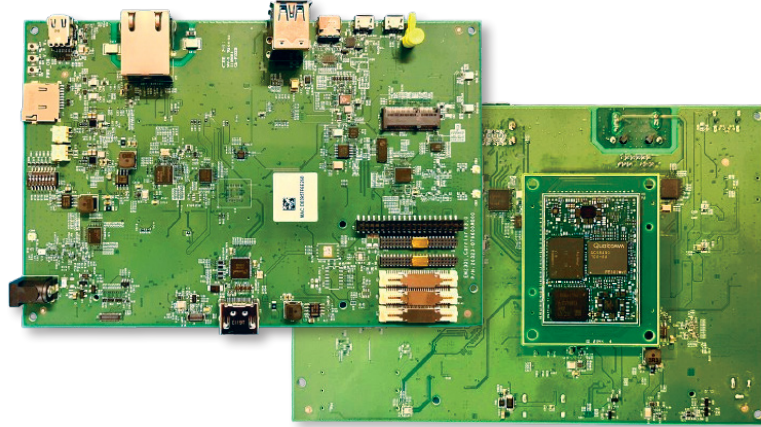


The Open-Q™ 6490CS Development Kit is designed to facilitate easy evaluation and development. The kit includes many standard sockets, enabling customers to choose from a wide range of third-party accessories. The SOM utilizes on-Chip with multiple specialized processing cores for powerful AI, image and graphics, and audio processing.

The development kit provides the ideal starting point for evaluating the Open-Q™ 6490CS SOM. The platform consists of Lantronix's Open-Q™ 6490CS SOM, an open-frame carrier board exposing all the available I/O, and a range of accessories to fast-track your product development.

## Key Features

- Powered by Open-Q™ 6490CS SOM
- Standard M.2 sockets for evaluating LTE, NVMe storage and Wi-Fi
- C-PHY and D-PHY MIPI camera interfaces
- HDMI, eDP, and DisplayPort
- Numerous I/O and connectivity options
- Storage interfaces for UFS, SPI, SD, NVMe storage and USB
- JTAG and debug ports
- Gigabit ethernet interfaces
- 96Boards-compliant High-Speed Connectors
- Android™ 13 and Qualcomm Linux



Open-Q™ 6490CS SOM

## Engineering Services:

We provide a full solution – our unparalleled engineering expertise and product development skills deliver innovative products that are cost-effective and can jumpstart your Go-to-Market timeline.

Our business model offers turnkey product development services, or we can augment your team in specific areas of development. The choice is yours.

## Key development expertise in:

- Camera development and tuning
- Voice control
- AI/ML Application
- Mechanical & RF design
- Thermal & power optimization

IoT product development made easy.



# Lantronix Open-Q™ 6490CS SOM Development Kit

## Hardware Specifications:

Open-Q™ 6490CS SOM		*See the Open-Q 6490CS SOM product brief for complete details
• Processors	Qualcomm® Dragonwing™ QCS6490 SoC built on 6nm technology: Kryo™ 670 Octa-core CPU: 1 Prime @ 2.7 GHz + 3 Gold @ 2.4 GHz + 4 Silver @ 1.8 GHz Hexagon™ 770 with Hexagon Vector eXtensions (HVX)	
• Memory/Storage	Supports external UFS and SD	
• Wireless	Supports external Wi-Fi via PCIe 1-lane, up to Wi-Fi 6E, 2x2 MU-MIMO + Bluetooth 5.2	
Open-Q™ 6490CS SOM Carrier Board		
• Display Interfaces	HDMI Port DisplayPort v1.4 via USB Type-C (ALT mode) Embedded DisplayPort (eDP)	
• Camera Interfaces	5x MIPI CSI interfaces, supports for both D-PHY and C-PHY camera interfaces	
• Audio Interfaces	Qualcomm® WSA8835 audio amplifiers for the left and right speaker output, 4 digital microphones	
• I/O Interfaces	2x USB 3.0 ports: 1x USB3.1 Type-C with DisplayPort, Micro USB-B OTG, Serial UART over USB for debug SD socket, SIM Card socket, Low-Speed and High-Speed connectors, GPIO, I2C, UART, M.2 for LTE, M.2 for Wi-Fi, M.2 for NVMe SSD Support up to 2.5 Gb Ethernet	
• Wireless	Onboard chip: Qualcomm® WCN6750 (2x2 MU-MIMO, with tri-band (2.4 GHz/5 GHz/6 GHz) and Bluetooth 5.2) External Module: Compatible with PCIe Wi-Fi module (WCBN813A) (Compliance with IEEE 802.11 b/g/n/ac/ax for Wi-Fi and Bluetooth 5.0 standards)	
• GPS	Qualcomm® SDR735 GPS RF receiver	
• Power Input	Input: 12V/3A	
• Form Factor	SOM: 47mm x 35mm, Carrier Board: 120mm x 180mm	
<b>Software:</b>		
• OS Support	Android 13 and Qualcomm Linux.	

## Lantronix Advantage

- › Unique expertise with Qualcomm products
- › Addressing small to mid-size customer requirements
- › Complete solutions with HW, SW, & Services
- › Global TAA/NDAA-compliant manufacturer
- › Focused on Edge intelligence with Qualcomm-based AI acceleration
- › Qualcomm-Aligned: 100% in sync with QC IIOT Roadmap

## Purchasing Information:

**LOQ-6490-EVK-BI**

Open-Q 6490CS development kit with accessories

© 2026 Lantronix, Inc. All rights reserved. Lantronix is a registered trademark of Lantronix, Inc. in the U.S. and other countries. Open-Q is a trademark of Lantronix, Inc. Qualcomm and Qualcomm Dragonwing are trademarks or registered trademarks of Qualcomm Incorporated. Qualcomm QCS6490, Qualcomm Hexagon and Qualcomm Kryo are products of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm, Hexagon and Kryo are trademarks of Qualcomm Incorporated, registered in the United States and other countries. All other trademarks are the property of their respective owners. Specifications subject to change without notice. Not all features listed may be supported in software. MPB-00251 Rev B (A4)

[Learn more at lantronix.com/open-q-6490-dev-kit](https://www.lantronix.com/open-q-6490-dev-kit)